
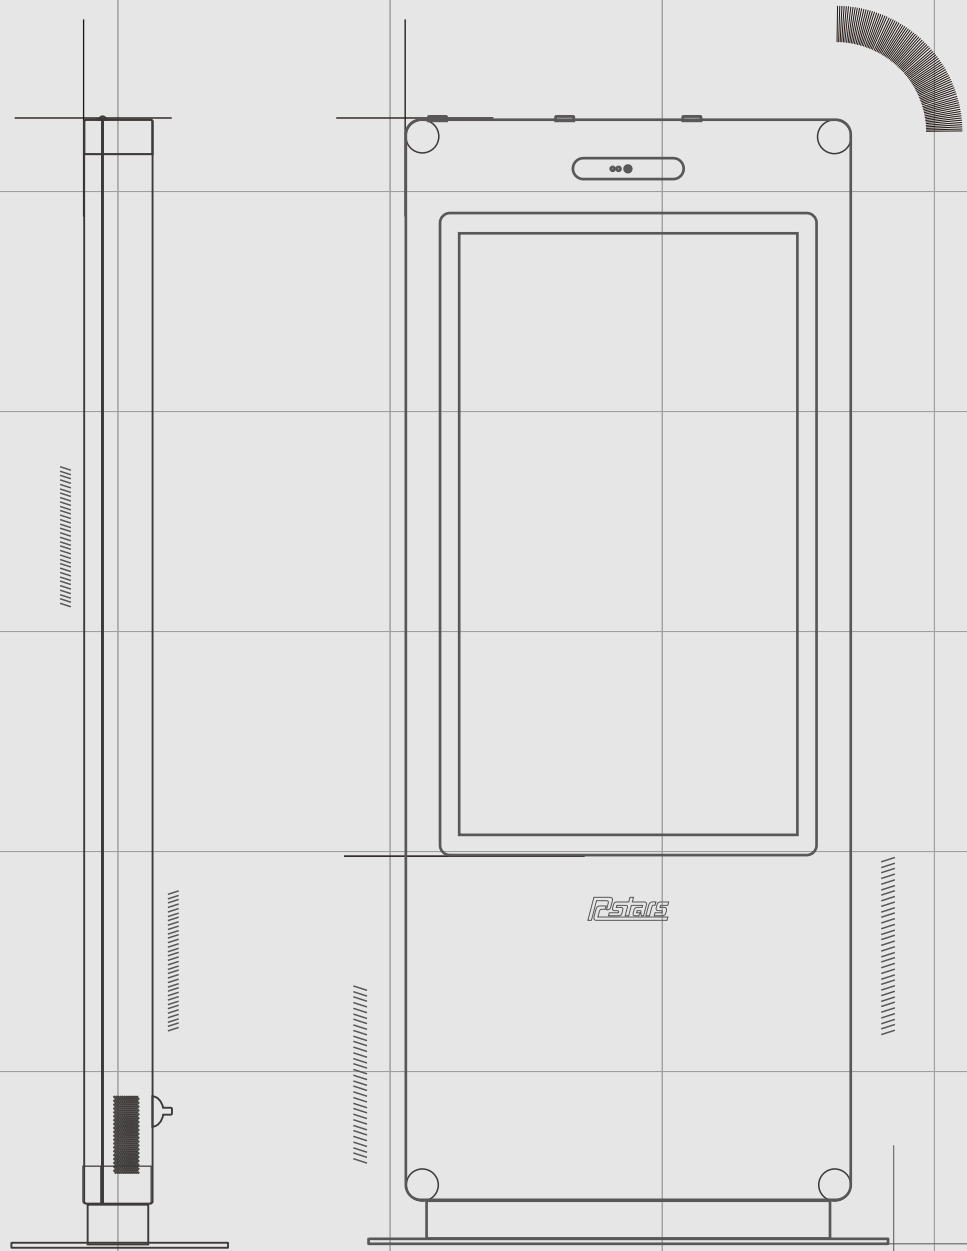


**WINDOW FACING HIGH
BRIGHTNESS**

TOUCH KIOSKS

SPECIAL SHAPES

AND MANY MORE




Digital Signage Display

Product Catalog

Rev.: MD-25-07



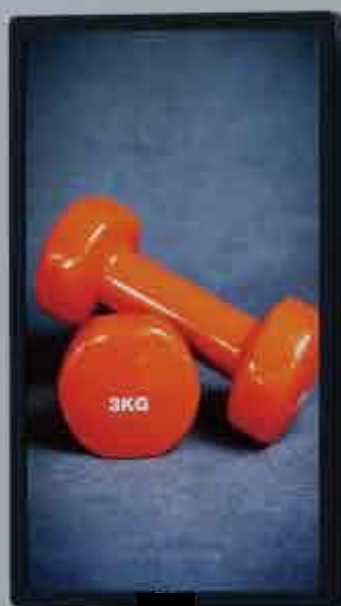



Content

About us	03
What we do	04
Freestanding Displays	05
Freestanding Digital Signage Display	07
LB Series	09
DL Series	11
JL Series	12
CB Series	13
All-in-One Self Order Kiosk	15
Wall Mounted LCD Display	16
Desktop Series	36
T Series	38
High-Brightness Series	40
Double Side Window Series	43
Outdoor Series	46
Semi-Outdoor Series	50
Battery-Powered Digital Signage Solution	52
LCD Hand Sanitizer Kiosk	57
Double Side LCD Monitor	61
AC Charging Pile	65
EINK Screen	72
Custom LED Digital Displays	75
OEM/ODM	79
Media Player Boxes	86
<hr/>	
System Support Program	88
Screen Size Specification	89
Content Management System	91
Advantage	92
Company Environment	93
Production Area&Finish Product Warehouse	94
Equipment Display	95
Algorithm Department	96
Honor Qualification	97
Successful Case	99

One-stop Digital Signage Solutions

We are a supplier of LCD digital signage displays since 2007. We provide all kinds of LCD displays ranging from small size 10.1 inch to large format 98 inch, which applied in indoor and outdoor application. Including retail display, interactive way finding kiosk, high brightness display, LCD video wall, stretched display, bus monitor, POS payment kiosk, Media player box etc.

As a High-tech company, Rcstars is constantly developing and researching new products to meet different customers' requirements. All of our products are exported to worldwide, USA, Canada, United Kingdom, Germany, Sweden, Switzerland, Denmark, Serbia, Russia, Japan, Korea, UAE, India and many other countries.



What We Do

We are a premier digital signage supplier, have served a range of clients, industries and end users all over the world. Our products include:

- Application: Indoor/Outdoor
- Type: Wall mounted/Floor stand/Tablet
- Size: 10"/12"/15"/19"/22"/24"/27"/32"/43"/49"/55"/65"/75"/86"/98"
- Stretched size: 14.9"/19.5"/23.1"/28.1"/28.8"/38.5"/49.5"/57.2"/69.3"
- Function: Android system/Windows system/Plug & Play/LCD Monitor
- Extended: Printer/Camera/QR scanner /RFID/Finger print/Keyboard etc

Freestanding Displays

Designed for retail, leisure and hospitality settings, our freestanding digital signage has an almost unlimited range of applications. From everyday advertising and marketing campaigns through to way-finding and interactive directories there is an option to suit your needs. Offered in a range of styles including the new ultra-slim design, double and single-sided options, with optional touch screen interactivity—these eye-catching displays solve a variety of marketing communication requirements.

WiFi Ready

Connect the display to the internet and unleash the full range of capabilities. Each display supports a wired and wireless connection to your local network. GSM connectivity can be added as an option.

Commercial Grade


Unlike domestic screens, these commercial grade displays are designed for 24/7 operation. The display panels are designed for 70,000 hours of continuous usage in commercial and public places.

Update from Anywhere

Connecting the displays to our management system enables content to be updated instantly from any internet connected device. Control operating hours, schedule content and update information whenever you need to.

Range of Sizes

Our range includes screens of all sizes from 22 inch through to 75 inch displays suitable for shopping centres, entertainment venues and public places. We also have smaller displays with literature dispensers for retail and marketing applications.

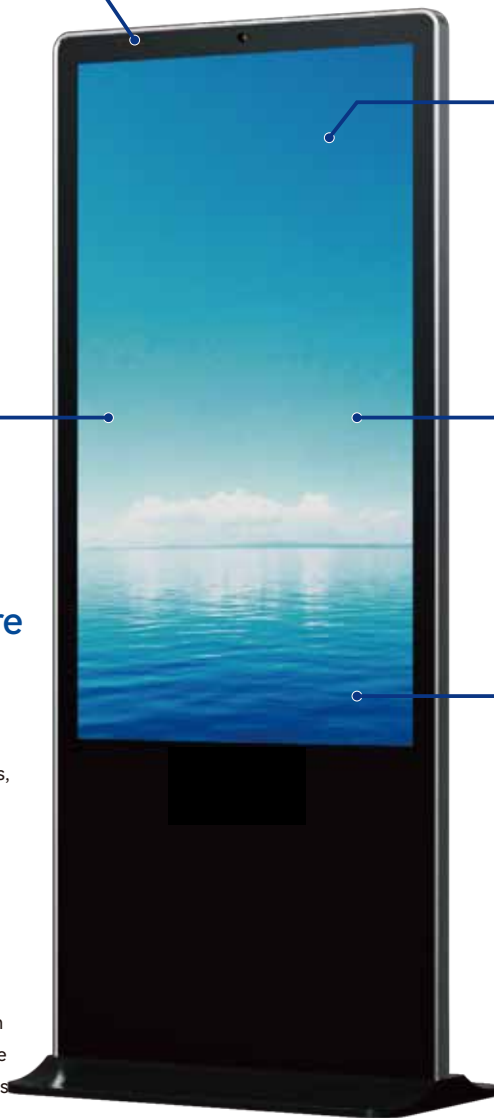

LED Backlit

Bright, colourful and high definition images are achieved using the latest in LED backlit technology that is energy efficient and adds to the lifespan on the screens. Panels are offered in a range of brightness levels ranging from 450 cd/m², through to sunlight readable 2500 cd/m², for outdoor use in direct sunlight.

Ultra Wide Viewing Angle

Using the latest IPS technology these displays offer an amazing 178° viewing angle to ensure content can be seen from almost any forward-facing position. This maximises the potential audience; ideal in retail, leisure and hospitality environments.

Touch Screen

Unlock the interactive features by adding Projected Capacitive (PCAP) touch screen technology to your display. Using the same technology as modern mobile and tablet devices, users can use everyday touch gestures to navigate on-screen.

Integrated Android Media Player

Each display comes with an integrated media player that can be connected to our content management system. Players are equipped with on-board memory storing content for local playback.

Freestanding Displays



1 Superior Cooling

Engineered Venting

Vents positioned in top and bottom compartment to direct airflow over components and display.

2 Secure

Pre-drilled Base Holes

Can be secured to the floor using pre-drilled holes in the base for added security.

3 Multimedia

Built in Speakers

4 Power Supply

Secure Organized Storage

Easily attach components to shelf for secure ventilated placement.

5 Optional Media

BrightSign

Android/Monitor/
Windows/Plug&play System

6 Secure

Steel Keyed Locks

Steel keyed locks secure the back door compartment.

7 Customized Screws For Anti-theft

8 Ultra-thin Aluminum Frame Design

Freestanding Digital Signage Display




Optional Color




Colour customization in any RAL reference Further configuration options upon request

Optional System

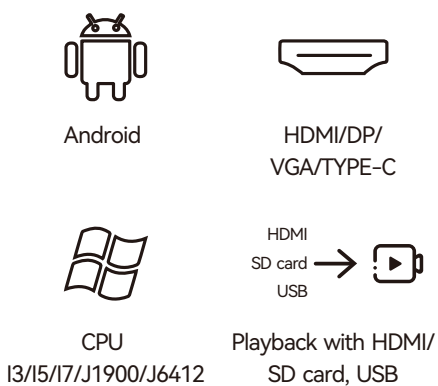

Optional Function

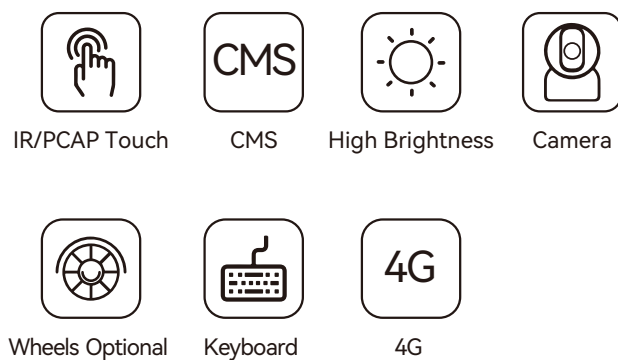

LB Series

32-65 Inch Single Sided Totem

Digital Free standing Kiosks are designed to support connecting with media player box/PC by HDMI input.

This Free standing Kiosks with built-in WiFi has New High Grade Industrial Quality and can be with design logo. By touching screens, you can see the information you need and order the things you need in the shop.

This Digital Signage is used typically to inform or advertise in public areas such as restaurants. There are major benefits for digital signs over traditional signs, including the ability to show exquisite pictures to catch clients' eyes.

Application

- Security
- Transportation
- ATM machine
- Medical equipment
- Gaming machine
- Networking POS

Design/Material:

- IR Touch/PCAP Touch optional
- Aluminum frame optional
- 22 inch- 75 inch optional
- Black/White optional
- 40 mm thickness design
- Tempered glass protection



LA

43 inch

LB

25/32/43/49/55/65/75 inch

LG

55 inch

LI

21.5 inch

LN

32 inch



LP
32 inch



LQ
19 inch



LP
21.5/32 inch



LU
32 inch



LW
55 inch

DL Series

32"/43"/49"/55"/65" Double Sided Totem

DL

White/Black optional
Double side open the door design



DL

DLG

DLG

DLG



Infrared/Capacitive
Touch Optional



Wheels Optional



7/24/365



Silent Fan



1080P



Double-sided can do the same brightness
and different brightness functions



Double-sided can do the same display
and different display functions

JL Series

Highly practical iphone design touch screen kiosk designed to help you connect to your clients. High-strength tempered glass, explosion-proof, scratch-proof, sturdy and durable; Stand-up installation, simple and convenient; Colors could be matte black/gloss white, other colors customized.



JB
43 inch



JK
21.5 inch/23.8 inch



JZ
32/43 inch



JI
15.6 inch/21.5 inch

Design/Material:

Mechanical: Rear with metal material+Aluminum frame with white color
 High Brightness: 500 nits-3500 nits optional
 Glass: Tempered glass protection
 Touch: Capacitive touch/IR touch screen optional
 Optional Size: 15.6"/21.5"/23.8"/32"/43"
 Power: AC 100-240 V
 Application: Self-service terminal
 Installation: Screen and stand could be removable
 Color: White/Black optional
 Extended Function: Camera/Keypad/Printer/4G/NFC optional
 Media Players: Android system/Windows system/Plug&play system/Monitor



Infrared/Capacitive
Touch Optional



7/24/365



Silent Fan



1080P

CB Series

Iphone Design Free Standing Kiosk

Interactive machine, display more comprehensive product information at the exhibition. Our premium interactive displays & touch screen signage enable simple, effective touch interactions and serve a variety of industries.

An interactive screen is a computer driven device, allowing users to access and manipulate electronic files by means of a LCD display.

Design/Material:

Machanical:	Metal case material with white painting
High Brightness:	500-3500 nits optional
Color:	White/Black optional
Touch:	IR/PCAP optional
Optional Size:	21.5-65 inch optional
Media Players:	Android system/Windows system/ Plug&play system/Monitor
Installation:	Standing-mounted
Power:	AC 100-240 V
Extended Function:	Camera/Keypad/Printer/4G/ NFC optional
Application:	Indoor self-service terminal (Shopping guide inquiry, banking business processing, auto show information display, sales office, library inquiry, cinema, hotel, airport, etc.)

Strong Network Support

Support Wi-Fi, LAN, 4G network.

7*24 Work

7×24h stable work.

Multiple File Formats

Support 1080P HD video and picture play, compatible with a variety of HD video format.

CMS

Support the CMS information release system, which can push the produced pictures/videos/audios and other real-time data to the distributed terminals through the network for display.



CS

32 inch

CC

21.5 inch

CZ

32/43/55 inch

CK

21.5/23.8/32/43/49/55/65 inch

CI

15 inch



CK

21.5/23.8/32/43/49/55/65 inch



SS

21.5 inch



GI

23.8 inch/32 inch



SDP

21.5 inch

All-in-One Self Order Kiosk



LNG
32 inch

EO
27 inch

YO
21.5 inch/32 inch

JO
32 inch


DYO
32 inch

Various Payment Options

Integrated QR code scanner, RFID card reader, POS and camera, providing multiple payment options, and the built-in printer can print receipts and coupons.







Wall Mounted LCD Display




Optional Mounting Bracket

Android LCD Advertising Displays feature a 75×75/100×100/200×200/400×400 mm VESA-mountable design that allows you to mount the display on a monitor stand or on a wall, depending on your specific needs. You can easily unscrew the base, and then mount the display on its new stand or wall mount.



Optional Color

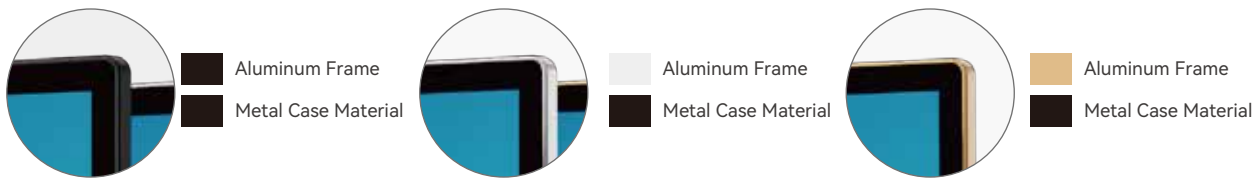

Colour customization in any RAL reference Further configuration options upon request

Optional System



Android
7.1/11 System



HDMI/DP/
VGA/TYPE-C



CPU
I3/I5/I7/J1900/J6412



Playback with HDMI/
SD card, USB

Optional Function



Camera



IP65



IR/PCAP Touch



CMS



High Brightness

J Series



- 10-65 inch optional
- Ultra-thin style
- Tempered glass protection
- Wall-mounting bracket optional
- Aluminum frame with silver color rear With metal material

OP Series



- Open frame design
- Wall-mounting bracket optional
- Color optional
- Rear with metal material

C Series



- 10-98 inch optional
- Close frame design
- Wall-mounting bracket optional
- Color optional
- Rear with metal material



32" Wooden Frame Advertising Display

High-end display make life more textured

LED backlight, power timer, low consumption, remote control, attract new customers, instant play, low cost, strong visual impact, fast content update;

- 32" wooden frame advertising display
- Android 7.1, RK 3288 2GB+8GB
- Color: Wood frame+white glass
- 1920×1080P
- 500 nits



CMS



1080P



Speaker



24/7/365



WIFI/LAN



PCAP Touch



Android
7.1/9.0/11 System



FR Series

Rotating Support Is Available

Rotate the frame 90° and the artwork displayed on it will automatically switch orientation, just like your smartphone.



Wireless Projection

Cast your GIFs/Collectibles/Music/Videos to the digital art frame



Application Area:

Shopping malls/Hotels/Restaurants/Supermarkets/Cupboard

Vehicle-Mounted Digital Signage Display

It is mainly used in transportation, such as bus, airplane, train and so on. Combining passenger information, entertainment and advertising together on one screen.



GPS



4G



Silent fan



Shock-Proof



7/24/365



F Series

15/15.6/17/17.3/18.5/19/21.5/32 inch

Ceiling Mount/Handrail Mount optional



Glass: Tempered Glass Protection
 Mechanical: Rear With Metal Material
 +Aluminum Frame With Silver Color



Ceiling installation

Application Area:

Ceiling Mount Bus/Train/Taxi/ Metro/Car Display
 Handrail Mount Bus/Train/Taxi/ Metro/Car Display

Network Transit TV
 In-Vehicles And Transportation

Wall-Mounted Industrial Grade Display

LCD industrial screen has high brightness and high contrast, with 178/178 ultra-wide viewing angle and high resolution, which can improve the visual experience.

Also equipped with Rcstars self-developed industrial-grade display driver board can meet the needs of industrial application scenarios.



Silent fan



178° Ultra-Wide Viewing Angle



IP65



7/24/365




EETI PCAP Touch



1080P

OP Series

15/17/19 inch

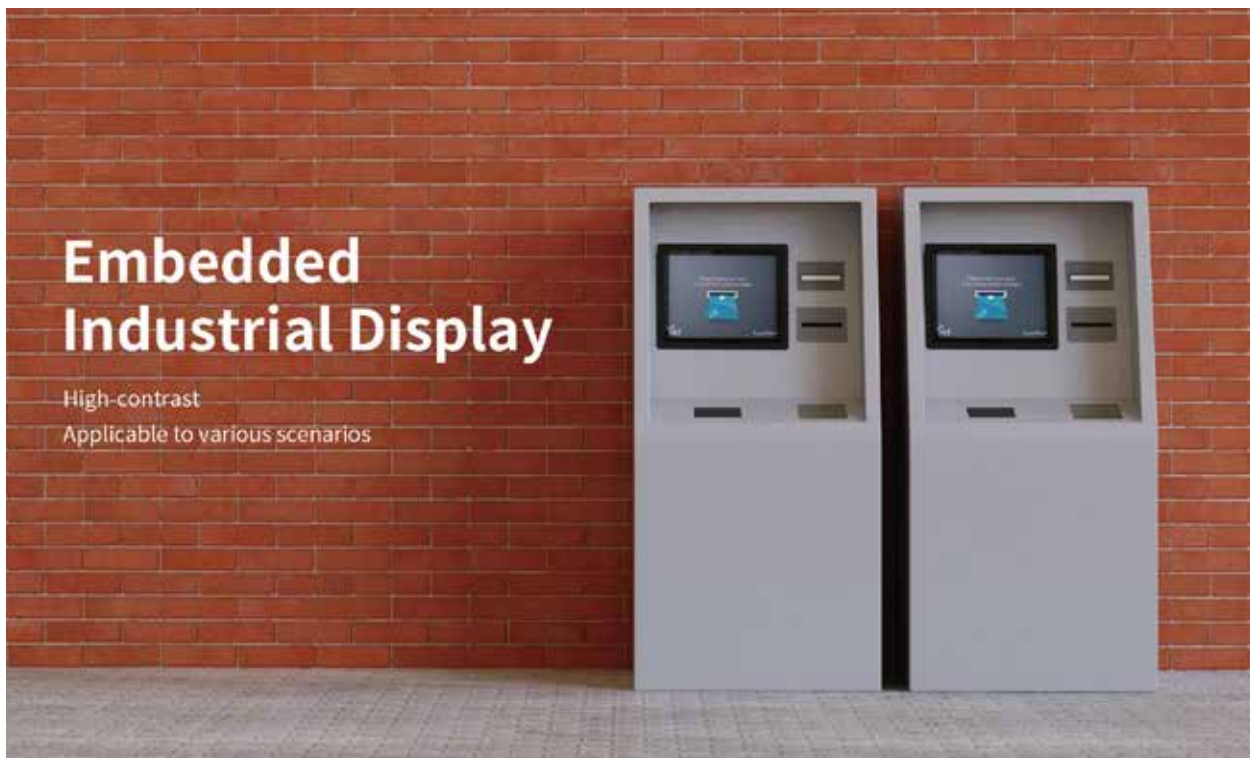

Application Area:

Used in Medical equipment, Industrial equipment, Running fitness machines, ATM machines, Airport check-in terminals, Payment terminals, Retail terminals, etc.

Business Super Slim Wall-Mounted Display

The BS series combines higher professional performance, free and convenient installation and useage, and business-style appearance. Its modern, slim design allows the display to blend into any business environment, providing a high-impact, seamless experience that is the perfect vehicle for brand stories and product presentations.



Silent fan



1080P



7/24/365



EETI PCAP Touch

BS Series

32/43/55 inch



Ultra-Thin Wall-Mounted Display with Arc Design

The arc design of the whole machine is composed of a unique semi-circular arc-shaped tempered glass with explosion-proof function and a round, smooth, ultra-thin and ultra-narrow high-grade metallic gray CNC material shell. The hidden wall-mounted bracket makes the display more beautiful.



7/24/365



EETI PCAP Touch



1080P



Silent fan




MT Series

32/55 inch



32" Ultra-Thin Interactive Digital Menu Boards with Stand

- 500 nits brightness, 1920×1080 resolution.
- High-gloss white metal case and stand, ultra-narrow bezels and ultra-thin body design.
- Free switching between landscape/vertical screen.
- 10-point capacitive touch precision sensing.
- Integrate all kinds of self-service and advertising display.



The screen can be detached from the stand for separate use.



55" Ultra Thin and Narrow Interactive Digital Monitor

55 inch screen, 500 nits brightness, 1920×1080 ultra-clear display.
Black metal case surrounded by silver aluminum frames.
10-point capacitive touch, as sensitive a touch experience as a mobile phone.



Bracket



Display



Fully Automatic Liftable Vertical Stand
Easily adjust viewing height by simply pressing the raise/lower keys.




Slimline Wall Mount Digital Poster

- 500 nits brightness, 1920×1080 resolution, 2k display.
- white metal case and aluminum frame, fully covered with white glass on the front.
- Super slim and narrow design, with adjustable color LED light strips embedded on both sides.
- Concealed wall mount bracket.





0 Distance On the Wall

Close-fitting wall bracket design.

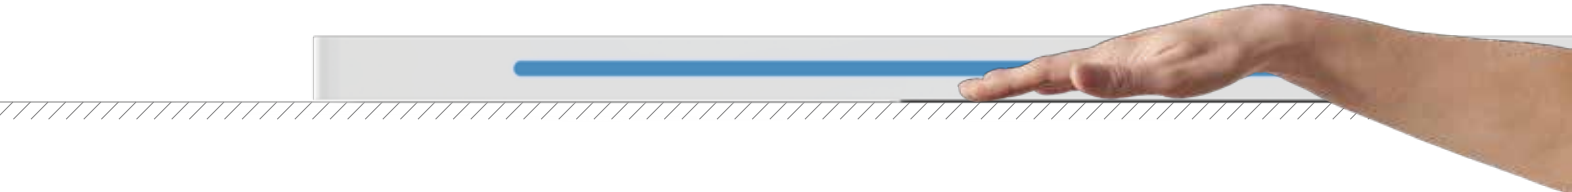

UT Series

32/43/55 inch

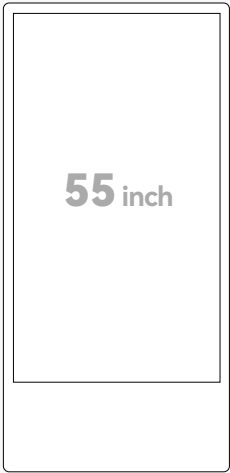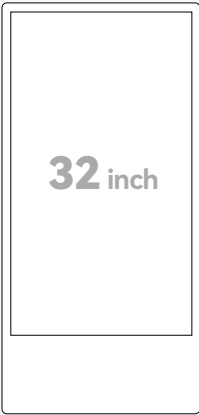

Super slim and ultra narrow design, with adjustable heating/color LED light strips embedded on both sides.



LCD Video Wall Solution

LCD Video wall solutions provide for all-in-one, easy-to-configure solution that is ideal for dynamic digital signage, information display and command & control applications. Our Video wall panels make your digital signage easy to implement, configure and operate. Video wall displays support an extensive array of connectivity options, including VGA, DVI, HDMI, composite, and supports RC-232 Serial connectivity for multiple display control. The ultra-thin bezel (4mm) make these displays appear nearly seamless for video walls consisting of up to 250 displays. Our video wall software allows you to change, reposition and resize content in real time from a single PC or Media Player box. No matter where you display these screens you can be assured people will be captivated by your message.



● Super Narrow Bezel

Featuring an extremely narrow bezel width of 1.8 mm/3.5 mm/5.5 mm, provide a near seamless image for public venues and control rooms.

● Comprehensive Set Of Inputs

LCD video walls come with a full array of connectivity and control options including DVI, HDMI, VGA and RJ45, RS232 AV OUT and AV IN.

● Software Control

Connect and control your video wall from a central admin-computer. Using display-based software to manage your network of displays from a single location via RJ45 and RS232. Easily identify your displays and fine-tune all display settings including brightness, contrast, saturation and sharpness.

● Create Dynamic Video Walls

video wall monitors can be joined together to build all kinds of multi-screen configurations.

● Auto Color Calibration

The calibration sensor is placed on the screen and communicates with the video wall through either USB or RS232. It automatically adjusts the color and brightness to ensure all individual displays closely match.

● Installation Optional

video wall design allows you to mount any landscape or portrait video wall configuration with any number of screens, designed with the wall mount bracket, free standing type bracket optional. Which enables clients to find the cost-effective solution to fit their needs.

Interface	Input	Output
DVI	×1	-
HDMI	×1	-
VGA	×1	-
CVBS	×1	×1
RS232	×1	×2
ON/OFF	×1	-




W Series Shaped stitching optional

Panel Specifications

Model No	RS-460W	RS-490W	RS-550W	RS-550W
Panel Model	46 inch TFT-LCD	49 inch TFT-LCD	55 inch TFT-LCD	55 inch TFT-LCD
Aspect Ratio	16:9	16:9	16:9	16:9
Max Resolution	1920×1080	1920×1080	1920×1080	1920×1080
Display color	16.7 M	16.7 M	16.7 M	16.7 M
Chroma	97 %	97 %	97 %	97 %
Brightness	500/700 cd/m ²	500/700 cd/m ²	500/700 cd/m ²	500/700 cd/m ²
Brightness Type	LED	LED	LED	LED
Seam(mm)	≤3.5 mm	≤1.8 mm ≤3.5 mm	≤1.8 mm ≤3.5 mm	≤1.7 mm
Contrast	3000:1	3000:1	3000:1	3000:1
Visual Angle	178°/178°	178°/178°	178°/178°	178°/178°
Response Time	8 ms	8 ms	8 ms	8 ms
Life(hrs)	>50,000(hrs)	>50,000(hrs)	>50,000(hrs)	>50,000(hrs)
Dimension(mm)	1024×122×579	1077.58×109.5×607.8	1211.4×111.7×682.2	1211.54×682.34×125.3
Color	Matte Black	Matte Black	Matte Black	Matte Black
Panel Material	Metal case SPCC	Metal case SPCC	Metal case SPCC	Metal case SPCC
Installation	Wall-mounted	Wall-mounted	Wall-mounted	Wall-mounted
Power Consumption	<5 W, ≤220 W	<5 W, ≤220 W	<5 W, ≤220 W	<5 W, ≤220 W
Power Supply	AC 100-240 V 50/60 Hz			

Wall Mount Series

Large square screen with a unique 1:1 ratio, broke the traditional 16:9 ratio. Its ultra-narrow edge gives a better visual effect to people. Ultra-thin apple-like design with a strong sense of art and technology makes the product more delicate, small and unique. It can be widely used in museums, art galleries, science and technology museums, art galleries, etc.

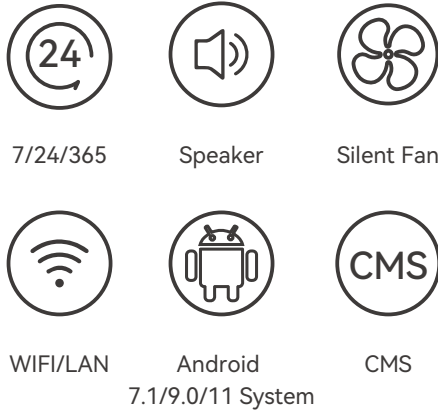

SQ Series

Technical Specifications

Panel Model	19.2 inch TFT LCD	25.9 inch TFT LCD	29.6 inch TFT LCD	33.4 inch TFT LCD
Max Resolution	950×950	950×950/1900×1900	950×950/1900×1900	950×950/1900×1900
Pixel Pitch	0.36375×0.36375	0.4903×0.4903	0.27963×0.27963	0.36375×0.36375
Viewing Angle	89/89/89/89	89/89/89/89	89/89/89/89	89/89/89/89
Contrast Ratio	1400:1	1200:1	1200:1	1400:1
Brightness	350~700 cd/m ²	300~700 cd/m ²	300~700 cd/m ²	300~700 cd/m ²
Response Time	6 ms	26 ms	6 ms	6 ms
Panel Size(mm)	382×382×65 mm	503×503×56 mm	569×569×65 mm	637×637×65 mm
Screen Weight	4.8 kg	9.5 kg	11 kg	17.5 kg
Lamp Type	WLED	WLED	WLED	WLED
Display area(mm)	345×345 mm	466×466 mm	532×532 mm	600×600 mm


Panel Model	45.7 inch TFT LCD	51 inch TFT LCD	52.5 inch TFT LCD	60 inch TFT LCD
Max Resolution	950×950/1900×1900	950×950/1900×1900	950×950/1900×1900	950×950/1900×1900
Pixel Pitch	0.372×0.372	0.429×0.429	0.4935×0.4935	0.5622×0.5622
Viewing Angle	89/89/89/89	89/89/89/89	89/89/89/89	89/89/89/89
Contrast Ratio	1400:1	1200:1	1200:1	1300:1
Brightness	300~700 cd/m ²	300~700 cd/m ²	300~700 cd/m ²	300~700 cd/m ²
Response Time	26 ms	8 ms	8 ms	8 ms
Panel Size(mm)	747×747×65 mm	857×857×65 mm	935×935×65 mm	1112×1112×65 mm
Screen Weight	22.7 kg	36 kg	35.8 kg	59 kg
Lamp Type	WLED	WLED	WLED	WLED
Display area(mm)	710×710 mm	820×820 mm	898×898 mm	1075×1075 mm

Design/Material

- Metal shell material
- Aluminum frame with silver color
- Tempered glass protection

Application

- Shopping malls
- Museums
- Exhibition halls..etc

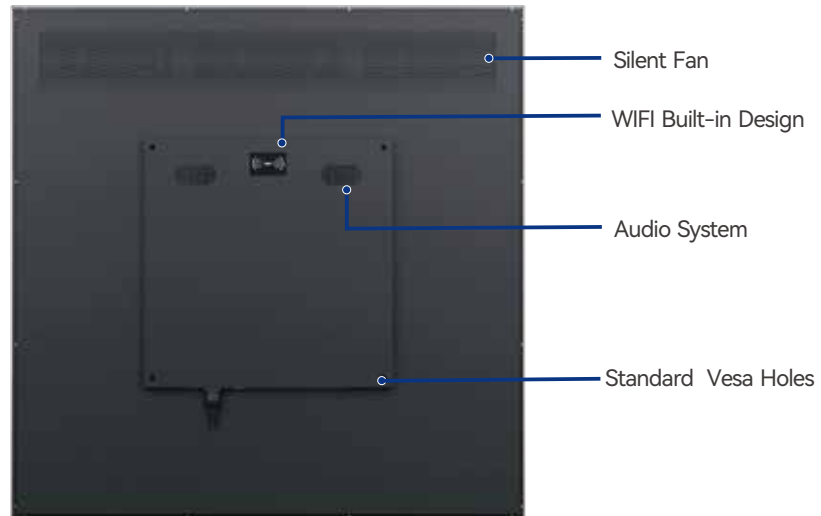

Ultra-Wide Stretched LCD Displays

Stretch bar lcd display is featured by high brightness and wide strip which can be used as supermarket advertising screen. Our stretched screen LCD displays solutions have many sizes, configurations and features, making them adaptable to all sorts of digital signage projects.




Design/Material:

Machanical:	Metal case
High Brightness:	500/700/1000/1500 nits optional
Color:	Black
Touch:	no
Application:	Indoor
Power:	AC 100-240 V/DC 12 V/DC 9-36 V
Installation:	Support wall hanging (VESA) and embedded installation mode, With VGA/DP/HDMI inputs.

Stretch Display

- Ultra-thin stretch screen, optimal proportion of long screen, high brightness, reasonable size specially designed for information display.
- Simultaneous display/different display is optional
- Ultra-narrow design
- Tempered glass can effectively protect the screen, which has a certain anti-beating effect, giving consideration to both light transmission and protection.

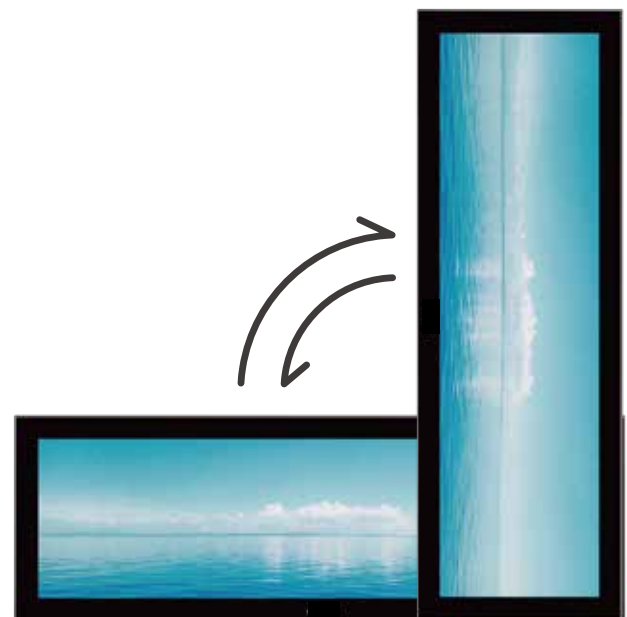

Screen-to-screen free switching

Technical Specifications



Panel Model	24 inch TFT LCD	24.5 inch TFT LCD	28 inch TFT LCD	28.6 inch TFT LCD
Max Resolution	1920×360	1920×540	1920×360/3840×720	1920×540/3840×1080
Pixel Pitch	0.31125×0.31125	0.31125×0.31125	0.36375×0.36375	0.36375×0.36375
Viewing Angle	89/89/89/89	89/89/89/89	89/89/89/89	89/89/89/89
Contrast Ratio	1000:1	1000:1	1400:1	1400:1
Brightness	300~700 cd/m ²	300~700 cd/m ²	300~700 cd/m ²	300~700 cd/m ²
Response Time	14 ms	14 ms	6 ms	6 ms
Panel Size(mm)	382×382×65 mm	627.60×198.05×48 mm	732.40×161.95×48 mm	732.40×230.45×48 mm
Screen Weight	2.35 kg	2.35 kg	4.8 kg	4.8 kg
Lamp Type	WLED	WLED	WLED	WLED
Display area(mm)	345×345 mm	597.60×112.05 mm	698.40×131.45 mm	698.40×196.45 mm

43 inch TFT LCD	43.8 inch TFT LCD	48.5 inch TFT LCD	49.5 inch TFT LCD	36 inch TFT LCD
3840×720/1920×360	3840×1080/1920×540	3840×720/1920×360	3840×1080/1920×540	3840×1080/1920×540
0.27963×0.27963	0.27963×0.27963	0.63×0.63	0.31×0.31	0.4903×0.4903
89/89/89/89	89/89/89/89	89/89/89/89	89/89/89/89	89/89/89/89
1100:1	1100:1	1400:1	1300:1	1200:1
300~700 cd/m ²	300~700 cd/m ²	300~700 cd/m ²	300~700 cd/m ²	300~700 cd/m ²
18 ms	18 ms	6 ms	18 ms	26 ms
1103.78×231.30×8 mm	1103.78×332.0×48 mm	1239.60×256.8×48 mm	1239.6×370.20×48 mm	908.10×273×48 mm
11 kg	11 kg	17.5 kg	12 kg	9.5 kg
WLED	WLED	WLED	WLED	WLED
1073.78×201.30 mm	1073.78×302 mm	1209.60×226.8 mm	1209.60×340.20 mm	878.10×243 mm

36.2 inch TFT LCD	37 inch TFT LCD	37.7 inch TFT LCD	38.6 inch TFT LCD	57.2 inch TFT LCD
3840×1200/1920×540	3840×1080/1920×540	3840×720/1920×360	3840×1080/1920×540	3840×720/1920×360
0.4903×0.4903	0.4903×0.4903	0.4903×0.4903	0.4903×0.4903	0.372×0.372
89/89/89/89	89/89/89/89	89/89/89/89	89/89/89/89	89/89/89/89
1200:1	1200:1	1200:1	1200:1	1400:1
300~700 cd/m ²	300~700 cd/m ²	300~700 cd/m ²	300~700 cd/m ²	300~700 cd/m ²
26 ms	26 ms	26 ms	26 ms	13 ms
908.10×300×48 mm	934.32×284.34×48 mm	971.18×206.47×48 mm	971.18×294.71×48 mm	1458.48×297.84×48 mm
9.5 kg	9.5 kg	9.5 kg	9.5 kg	22.7 kg
WLED	WLED	WLED	WLED	WLED
878.10×270 mm	904.32×254.34 mm	941.18×176.47 mm	941.18×264.71 mm	1428.48×267.84 mm

58.4 inch TFT LCD	69.4 inch TFT LCD	77.5 inch TFT LCD	88 inch TFT LCD
3840×1080/1920×540	3840×1440	3840×1080/1920×540	3840×1080
0.372×0.372	0.429×0.429	0.4935×0.4935	0.5622×0.5622
89/89/89/89	89/89/89/89	89/89/89/89	89/89/89/89
1400:1	1200:1	1200:1	1300:1
300~700 cd/m ²	300~700 cd/m ²	300~700 cd/m ²	300~700 cd/m ²
13 ms	8 ms	8 ms	8 ms
1458.48×431.76×48 mm	1689.7×658×48 mm	1935.04×573*48 mm	2198.9×647×48 mm
22.7 kg	36 kg	35.8 kg	59 kg
WLED	WLED	WLED	WLED
1428.48×401.76 mm	1649.7×618 mm	1895.04×533 mm	2158.9×607 mm

• Wall Mounted LCD Display •

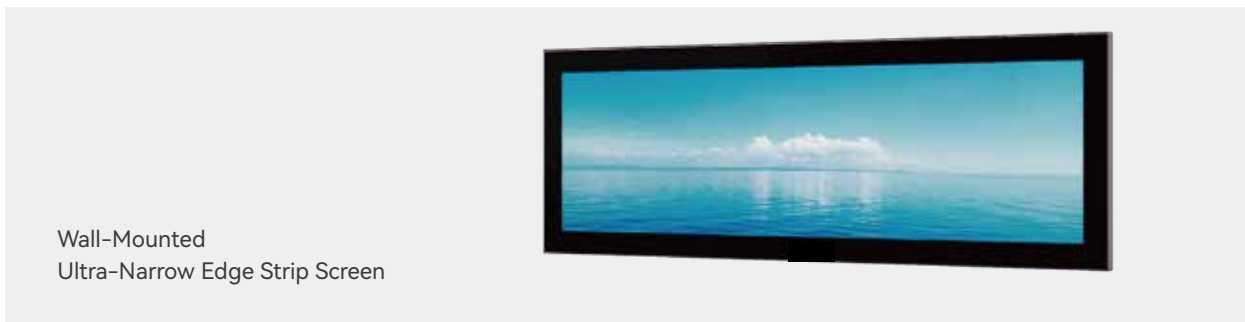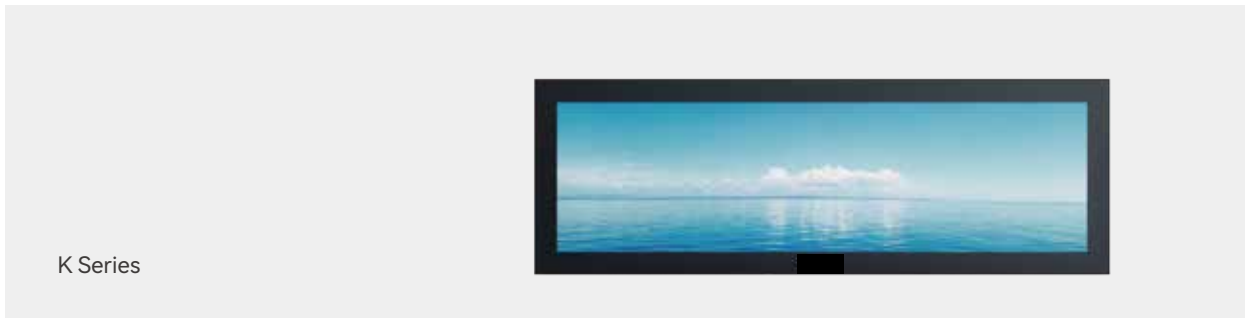

• Double Side LCD Display •



• Guidepost LCD Display •



• Free Standing LCD Display •



RS-415KLD

RS-693KL


RS-693KLB

RS-693KLA

Desktop Interactive Display



PCAP Touch




CMS




High Brightness



WIFI/LAN



1080P



Speaker

Desktop Series

Desktop Interactive Display

Design/Material

- 10-21.5 inch optional
- Metal shell material
- Aluminum frame with silver color
- Tempered glass protection
- Screen and stand
- Could be removable

Optional

- NFC card reader
- QR code scanner
- Double-sided display
- Wireless charging
- Camera
- Thermal printer
- Three-sided display

Application

- Hotel
- The coffee shop
- Jewelry store
- Checkstand
- The counter
- Stage



L
32 inch



L
15.6/21.5 inch



JL
10.1/15 inch



A
15.6 inch



LD
15.6 inch



PR
15.6 inch 4k/2k



CR
10.1+15.6 inch



U
15.6 inch



LT
21.5 inch



LT(ISE2025)
21.5 inch

T Series

- FHD IPS displays with multi-touch.
- 500 nits brightness, 1920×1080 resolution.
- Optical bonding, dustproof, moisture-proof and more durable.
- CNC silver all-aluminum case, ultra-narrow frame and ultra-slim screen.
- All-in-one design integrates desktop computer, monitor and touch screen to save space.
- Default adjustable viewing angle desktop stand, VESA holes and wall mounted bracket optional.
- Intel® Core™ i5 CPU and 8 GB of RAM, Windows 10 OS.
- Built-in Bluetooth and Wi-Fi, designed with versatile I/O such as USB.



Efficient and Flexible Connectivity

With Bluetooth and USB port, you can connect peripherals such as mice, keyboards, and mobile phones at any time to enable efficient work mode.



IPS Display Restores Reality

The 178° wide viewing angle, full-color reproduction and 2K resolution make it possible for high-quality images to be viewed from any angle.



Flexible Installation

Desktop stand with adjustable viewing angle up and down. The desktop stand can be rotated 90° to switch between horizontal and vertical screens; standard VESA holes and wall mounted bracket are optional.



PT

21.5 / 23.8 / 27



Freestanding

TL

21.5 / 23.8 / 27 / 32 / 43 /
49 / 55 / 65



Wall Mounted
TW



Desktop
TT



Open frame design
TO

10.1 / 10.4 / 12.1 / 13.3 / 15 / 15.6 / 17 / 17.3 / 18.5 / 19 / 21.5 / 23.8 / 27 / 32 / 43 / 49 / 55

High-Brightness Digital Signage Solutions

1000 nits

2000 nits

3000 nits

5000 nits



Provides a good LCD display solution in direct sunlight

It has continually been developing a sunlight readable LCD Display solution. We offers a full range of high brightness and sunlight readable LCD display solutions to meet consumer demand. Transflective LCD Technology can be applied to certain selected regular TFT LCD to introduce the LCD with a reflective function. With the imposed reflective function, the modified LCD can reflect the ambient light passing the LCD Cell and utilize the reflected light beams as its illumination. The stronger ambient light is, the brighter LCD will appear. As result, the modified LCD is viewable under sunlight.



Brightness Sensor

Auto Brightness Sensor

Screen brightness is automatically adjusted by its surrounding illumination level.



Anti-Reflective

AG Glass With Anti-Reflective Function

Anti-reflective AG glass can avoid interfere of ultraviolet radiation.



Sunlight Readable

Sunlight Readable

Regular LCD is difficult to read under strong ambient light. With sufficient reflective illuminations LCD becomes readable everywhere. The high brightness outdoor displays with 2000 nits, maintains high picture quality and image readability in an outdoor environments.



Open Frame

Close-Frame/Open Frame Type

We could provide OEM/ODM service, so monitor could be with close frame and open frame different design.



Silent Fan

Smart Fans For Cooling

Self-cooling solution equips this display to handle a wide operating temperature range from 0 °C-35 °C.



Different Brightness


Brightness Optional

Depending on different application environment, the monitor could be with different brightness, such as 500 nits/1000 nits/1500 nits/2000 nits/2500 nits/3000 nits/5000 nits.



55" Indoor Freestanding High Brightness Digital Wayfinding Signage

1. 55 inch screen, 1920×1080 ultra-clear resolution.
2. 3000 nits high brightness, built-in automatic light sensor for brightness adaptive, clear and bright display at any time.
3. The entire digital signage is made of white metal material, and the bracket design is special streamlined and special-shaped hollow.
4. Equipped with warm and cold/color-adjustable LED light bars on the left and right sides.
5. Android support CMS cloud update management.



3000 nits
High Brightness



Single-Sided and Double-sided Android OS Window LCD Display

Ditch costly paper signs that blend into the background. Our all-new digital LCD posters give businesses a stunning and dynamic solution that allows them to promote multiple offers and change content quickly and easily. Your window front is prime advertising space for your business and it should be working hard to grab attention and drive sales. Static printed posters only allow one promotion at a time and can be hard to see, whereas our digital window posters are bright enough to be seen from a distance in direct sunlight.



CMS



1080P



4K



High Brightness



WIFI/LAN



Speaker



Side A

Side B

Dual Side Monitor



2000 nits
Face to Outdoor



500 nits
Face to Indoor



Front

Back



Double-sided can do the same brightness and different brightness functions



85□- Tni temperature -110□


Ultra Resistant To Blackening

Thanks to their special ultra-high brightness panels, these displays can withstand surface temperatures up to 110°C without suffering from any blackening defect. This is crucial for outward-facing window displays, which must contend with exposure to direct sunlight.



6:00AM OPEN

9:00PM OFF



Power Timer

The environmentally friendly power timer allows you to assign daily or weekly tum-on and off time to the LCD screen. the ability to power on and off automatically means that the LCD screen is used only when needed, improve environmental efficiency.

Ceiling installation



Single side
55 inch



Double side
43 inch



Double side
55 inch

Freestanding





SWB Series
(ISE2025)


Outdoor Display With IP65 Grade


ODC/ODL Series outdoor display delivers the optimal solution that is completely equipped for operating reliably in virtually any environment. With unique thermal management technology, super slim depth design with embeded power box, OPS box ensure durability, flexibility and 24/7/365 peformance in extreme temperature, 3500-4000 nits brightness, anti-reflection glass ensure delivering eye-catching content to captivate customers even in the direct sunlight.




- 


Sunlight Readable
- 


Auto Brightness
Sensor
- 


WIFI/LAN
- 

24/7/365
- 

Anti-Reflective
- 

Silent Fan
- 

IP65
- 

4K
- 

CMS

Strong Reliability



Supported Operating Temperature

Unique technology on LCD panel provides excellent reliability under a wide range of operating temperatures.



Electrical Safety

outdoor display has electrical circuit breaker and surge suppressor, which be sure absolute protection from overcurrent short circuits and unwanted voltages. It is helpful to prevent the




High Brightness

outdoor display has high brightness of 4,000 cd/m² and antireflection glass, which delivers content clearly in the direct sunlight, catches the attention of viewers no matter where they are and achieve itself to be excellent visibility.




IP65 Design Protection

outdoor display is featured by IP65 grade design and 24/7 for reliable operation, which can be supported in any environment, sun, rain, snow and dust, etc.

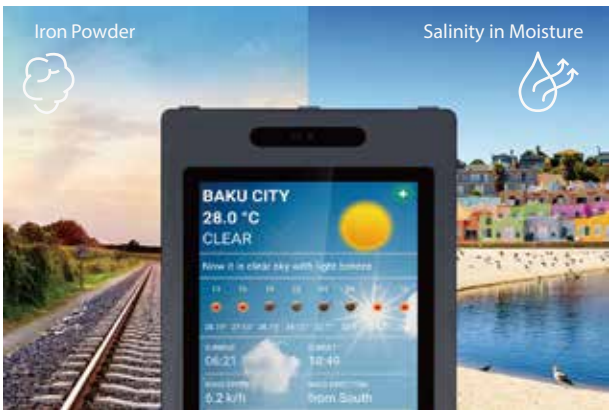


Conformal Coating

The conformal coating protects the outdoor display against dust, iron powder and humidity, etc during maintenance.

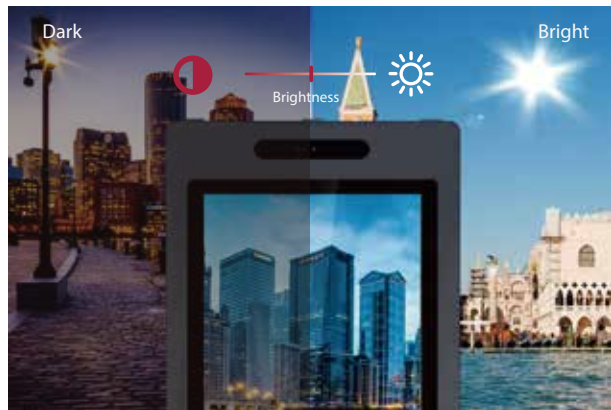

Auto Brightness Control

The outdoor screen brightness can be automatically adjusted depending on the light.

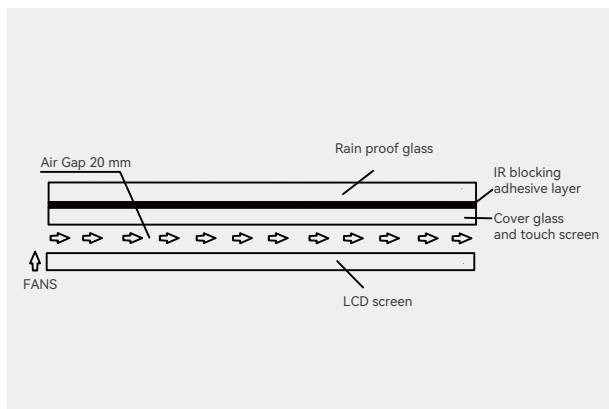

Unique Thermal Management

The fan accelerates the air flow in the air gap, and takes away the heat generated by the LCD panel in front of the LCD screen itself and the heat generated by the sunlight for a long time, so as to



Protective Glass

outdoor display has 6 mm tempered glass with IK09/10 Endurance, which prevents external damage and enables efficient repair.



Size



ODC



ODCG



ODC



ODK



ODLD



ODLM



ODLM(ISE2025)



ODLN



ODLN(ISE2025)
Double Size



ODLG



ODLG




ODD



ODL

Semi-Outdoor Waterproof UHD Smart TVs

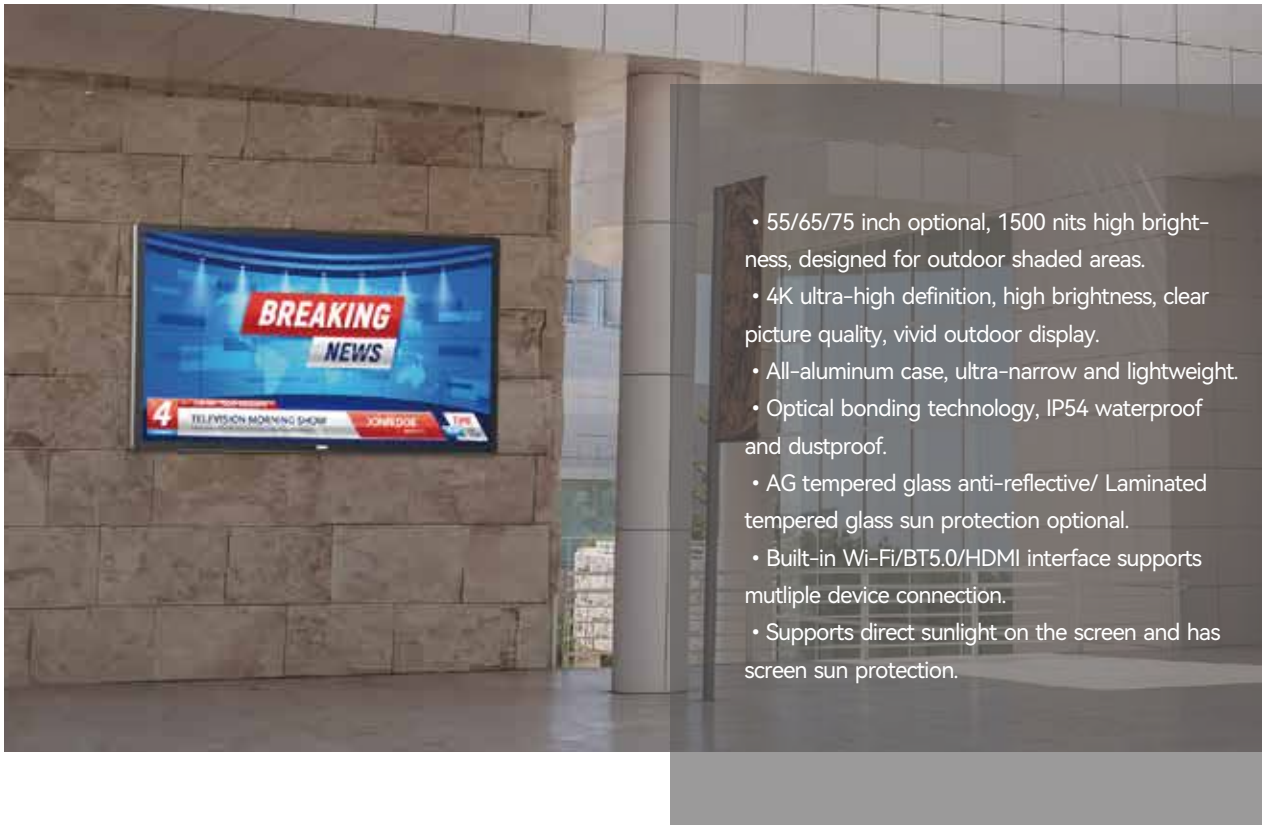


EETI PCAP
Touch



Audio System



Wi-Fi



Brightness
1500 cd/m²



IP54



Operating
Temperature



TV

43/55/65 inch

Strong Reliability



All-aluminum Case is lightweight and Resistant to High Temperatures

The case is designed in a stylish ultra-narrow frame design and made of all-aluminum material with strong heat dissipation performance that can withstand outdoor high temperatures.



Highlight Ultra-Clear Display

It adopts a high-quality 4K UHD screen with 1500 brightness that is 3 times higher than indoor TV, so the screen content is also clearly visible under strong outdoor light.



Waterproof and Dustproof

IP54 outdoor waterproof and dustproof rating, using optical bonding technology to block dust, moisture and condensation in front of the screen, preventing rain and other outdoor factors.



No Black Screen Under Direct Sunlight

Laminated glass has excellent sun protection function, and the use of TNI high temperature resistant screen enhances it. There is no need to worry about the blackening of the screen caused by long-term direct exposure to strong outdoor light.

Battery-Powered Digital Signage Solution





55" High Brightness Battery Powered Commercial Window Kiosk

1. 55 inch screen, 2000 nits brightness, 1920×1080 resolution.
2. The lithium battery has a battery life of up to 10 hours. You can get rid of the limitations of wires and change the display position as needed.
3. The "H"-shaped bracket for easy movement, the "triangular" base for stable installation, and the body are all made of white metal and designed with smooth arcs.
4. Android, support CMS remote information publish.




Hidden Roller optional

This allows for free movement of placements and the ability to return to charging when the battery is low.




Rollable Smart Touch Screen with Battery Operated


Featuring a commercial-grade LCD panel based on IPS technology, it offers an almost flat 178° viewing angle, ensuring clear visibility from any position.

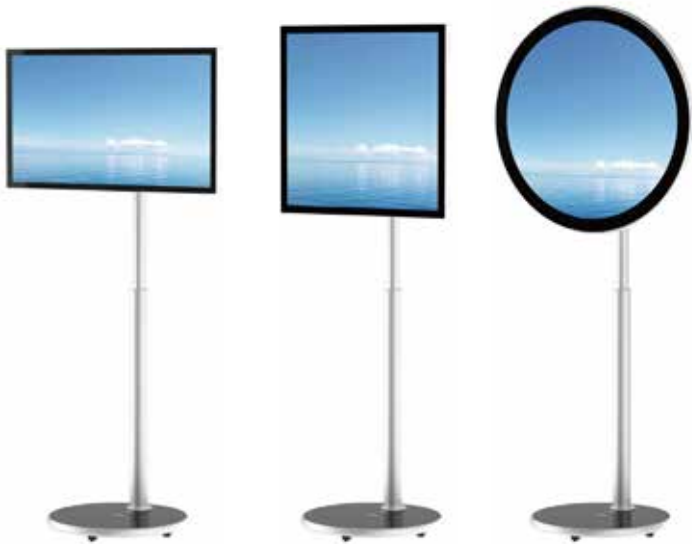

54

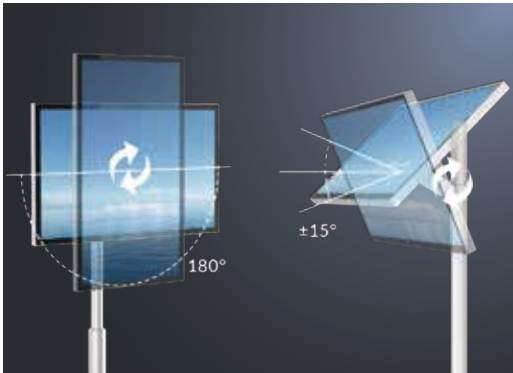

Free Rotation, Tilting, Adjustment

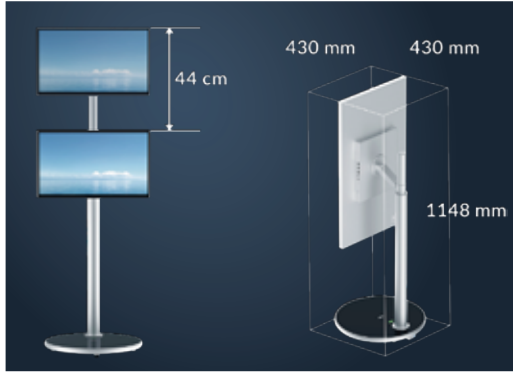

Height Adjustable



Slim Tablet Touch Floor Kiosk with Battery Operated

- 15.6/23.8 inch, 2K resolution, 500 nits brightness, vivid and bright image quality.
- High-precision capacitive touchscreen, instant customer response.
- 10-hour lithium battery life, no more cable constraints.
- Supports landscape/portrait modes, with adaptive screen functionality.
- Ultra-slim metal case, surrounding aluminum frame, and full glass coverage.
- Optional printer, RFID card reader, etc., to expand self-service options.
- Android OS, supports CMS.



Not Just Ultra-thin

Featuring a black metal casing and stand, complemented by silver aluminum frame and full glass coverage, it is both sturdy and aesthetically pleasing with an exceptional texture.



Table Top Battery Powered Mini Self Ordering Kiosk

- 15.6" / 21.5" LCD screens, 500 nits brightness, 2K resolution, wide viewing angles.
- Android 11 OS (optional Android 7.1), with free CMS unlock for cloud management.
- Anti-glare AG glass keeps the screen clear even in bright indoor light.
- CNC-crafted L-shaped metal case, with optional silver and black colors.
- 10-point capacitive touchscreen, quickly responds to customer needs.
- 10-hour battery life, freeing it from outlets and cables.



Battery Powered Digital Menu

Provide advertising display and self-ordering on any table. The battery-powered menu requires no power cords, allowing flexible placement, reducing clutter, and enhancing restaurant aesthetics and safety.



15.6 inch

21.5 inch

LCD Hand Sanitizer Kiosk



RS-220SDU/SDC Series

Patent Number: 202030132006.0

EUIPO: No 007808795-0001



SDU/SDC



CMS



1080P



4G



Android OS



Wash hands



WIFI/LAN



PCAP Touch



Speaker

• Patent certificate •



EU patent



Appearance patent



Invention patent



FDA

Accessory Part







4 Level Options



Foam/Gel Nozzle

Liquid Nozzle

Level 1	Level 2	Level 3	Level 4
			
0.3 ml	0.8 ml	1.7 ml	2.6 ml



Accurate infrared sensor and face recognition camera, quickly identify temperature anomalies.



3 mm toughened glass, 10 point capacitive touch, waterproof, explosion proof and full metal jacket are sturdy and reliable.



Light signals indicate liquid status.
Sufficient (Green)
Empty (Red)



It featured by accurate infrared sensor and laser sensor with handing out hand sanitizer automatically instead of traditional hand washing with hand pressure. No contact is more effective in preventing the spread of germs.




5 L large capacity liquid device, prolong the use times.



Self-development temperature detection/Hand-washing counting



Wall-mounted installation



Standing installation



Accessory Part

Accessories List	Standing Quantity	Wall-mounted Quantity
Remote-Control Unit	×1	×1
Key	×4	×3
Screws	×12	-
Gasket	×4	-
Wall Mounting Bracket	-	×1
Internal Hexagonal Wrench	×1	×1
Specification	×1	×1
Warranty Card	×1	×1
Certificate of Qualification	×1	×1
Power Cable	-	×1

Double Side LCD Monitor



Casino Double-sided Freestanding LCD Monitor which can be double-sided & single sided with available LED light design on the side is designed to catch clients eyes.



Double-sided can do the same brightness and different brightness functions



Double-sided can do the same display and different display function

RS-240DM



Machanical	Metal case
Glass	-
Color	Black/white
Optional Size	21.5"/23.8"/27"
Application	Gaming machine/casino
Installation	Desktop bracket installation
Power	DC 12 V
Extended Function	LED light

RS-240DJM



Machanical	Metal case+Aluminum frame with silver color
Glass	Tempered glass protection
Color	Gold and black optional
Optional Size	21.5"/23.8"/27"
Application	Gaming machine/casino
Installation	Desktop bracket installation
Power	DC 12 V
Extended Function	LED light

RS-430REAZ


43 Inch Curved Touch Screen Monitors Curved Screen Slot Machine Cabinet Slot Game

Our curved monitors encourage greater customer interaction with high-speed processing, image quality and touch accuracy. Full control of all display and display parameters via On-Screen-Display (OSD).

Machanical	Strong rugged metal housing
Power	Power 110-240 V
Design	Open and closed frame design
Resolution	43" Full HD 1080P Resolution
Touch	10-touch PCAP Touchscreen
Screen	Eye-catching C-Curved Screen
Support	Support Wi-Fi, LAN Support horizontal and vertical display mode, support LVDS/HDMI boot output; Gaming machine/casino




RE

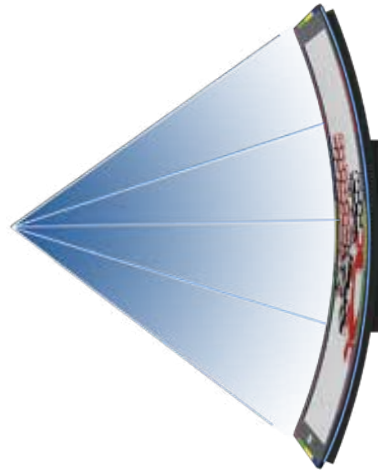

1500R C-Curved Panels



10-Point
PCAP Touchscreen



Suitable For
Portrait & Landscape



FHD/UHD
Resolution



CMS



WIFI/LAN



Speaker



Round Double Sided Desktop Roulette Game Screen

- 23.6 inch AUO round screen, 1280×1280 resolution, wide viewing-angle.
- 1500 nits indoor high brightness, suitable for complex lighting environments.
- Dual-sided display with synchronous and asynchronous control.
- Double-sided surround LED multicolor light strips enhance the gaming atmosphere.
- Sturdy metal case, full-coverage explosion-proof tempered glass on the screen.
- No-installation desktop with a base equipped with non-slip pads to ensure stability.
- Optional Camera to provide extra security at the table.
- Suitable for Baccarat, Poker, and Progressive games.
- Android OS supports CMS cloud unified updates.



Designed for Roulette Games

1:1 resolution circular screen accurately replicates the roulette wheel games, enhancing gamblers immersion and engagement.



Flexible Installation

No installation is required for the tabletop stand; simply place it on the table. You can easily move and adjust it based on foot traffic and event needs, adapting to different layouts and requirements.

AC Charging Pile



RS-550EVDTAZ-PCAP

55 Inch Double Sided IP65 Outdoor EV Charging Kiosk



Support all weather use.

IP65 waterproof level, even in wind and rain, outdoor charging is still safe.

- 55" Outdoor quick ev charging kiosk
- Android
- 1920×1080P
- 3500 nits brightness
- Color: White front+black glass+black frame
- 10 points capacitive touch
- Plug and charge
- Swipe the card to start and stop
- Charge by credit card/Charging card
- Network scanning code
- Single gun (7 KW)
- Double gun (14 KW)



EETI PCAP Touch



Multiple Payment Methods



Autostop



IP65



Android



Short Circuit Protection



Overheating Protection



Voltage Protection




Charging Protection



Single Gun(7 KW)
Double Gun(14 KW)

Universal Charging Head,
Plug And Charge.

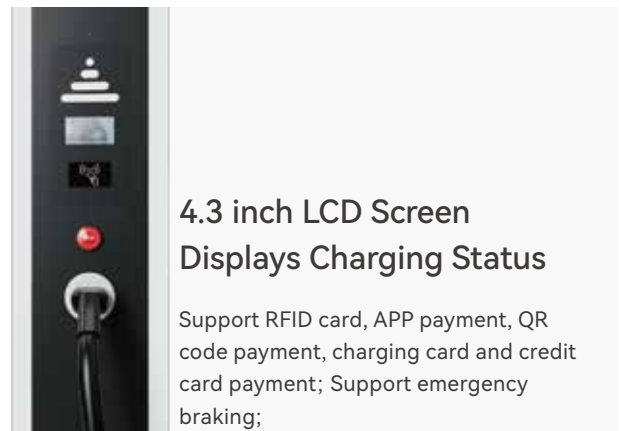

4.3 inch LCD Screen
Displays Charging Status

Support RFID card, APP payment, QR
code payment, charging card and credit
card payment; Support emergency
braking;



Item	Standard Parameter Value
Rated power rating	14.5 KW
Input voltage	AC 220 V +/-20%
Output current current	32 A×2
Output voltage	AC 220 V +/-20%
Number of charging guns	Double
Man machine interface	55 inch+4.3 inch LED
Networking Mode	Ethernet, WI-FI (Bluetooth, 4G optional)
Support protocol	Support OCPP charging protocol
Charging start mode	NFC(QR code optional) Network scan code plug and charge
Protection Function	Short circuit protection, over current protection, over temperature protection, leakage protection, over/under voltage protection
Charging mode	Automatic charging, full self-stop
Protection class	IP65
Length of gun line	5 M
Usage Environment	Outdoor
Operating temperature	-20 - 50 °C
Touch	Responsive 10 points PCAP touch Optional

EV Charging Piles



RS-215EVL

RS-043EVL

Design/Material


- E-stop available.
- Contact-less Smart Card Reader.
- Locatable via App.
- Light bar Noticable if charged.
- E-stop with one button.
- Multiple charging modes: automatic, timing, fixed fee, reservation.
- An LCD touch screen can be added to achieve human-computer interaction and advertising display.
- Charging-friendly in AC Power Supply 220 V.
- Support RFID card, APP payment, scan code payment and credit card payment.

Charging

Charging Completed



Charging head standard optional



Credit card machine





Hanging wire frame




Emergency stop





- 

Charging Protection
- 

Short Circuit Protection
- 

IP65
- 

Voltage Protection
- 

Autostop
- 

Overheating Protection

Item	Standard Parameter Value
Rated power rating	7 KW
Input voltage	AC 220 V +/-20%
Output current current	32A
Output voltage	AC 220 V +/-20%
Number of charging guns	Single
Man machine interface	21.5 inch LED
Networking Mode	Ethernet, WIFI (Bluetooth, 4G optional)
Support protocol	Support OCPP charging protocol
Charging start mode	NFC(QR code optional) Network scan code plug and charge
Protection Function	Short circuit protection, over current protection, over temperature protection, leakage protection, over/under voltage protection
Charging mode	Automatic charging, full self-stop
Protection class	IP65
Length of gun line	5 M
Usage Environment	Outdoor
Operating temperature	-20 - 50 °C
Touch	Responsive 10 points PCAP touch Optional



55" Double Sided IP65 Outdoor AC EV Charging Kiosk

The case cleverly combines flexible polygons and smooth curves, featuring a classic black and white color scheme. It is both novel and visually appealing, suitable for various settings.



Short Circuit
Protection



Overheating
Protection



Voltage
Protection



Charging
Protection

Panel

Panel Model	55 inch
Max Resolution	1920×1080
Aspect Ratio	16:09
Pixel Pitch	0.63×0.63
Viewing Angle	89/89/89/89
Display Area	1209.6×680.4 mm
(mm)	1244.6×720.9 mm
Panel Size(mm)	17.5 kg



21.5" Waterproof Smart AC EV Charger With Digital Display

The case features an elegant RC-1162 white finish with smooth curves, complemented by specially crafted black curved glass. This design is ideal for various applications, particularly emphasizing a high-end and fashionable aesthetic.



Short Circuit
Protection



Overheating
Protection



Voltage
Protection



Charging
Protection

Panel

Panel Model	21.5 inch TFT LED
Max Resolution	1920×1080
Aspect Ratio	16:09
Pixel Pitch	0.24795×0.24795
Viewing Angle	89/89/89/89
Display Area	476.064×267.786 mm
(mm)	495.6×292.2×10.7 mm
Panel Size(mm)	2 kg



Eink Screen

Stratford Library

40

Eiellnaukio
Eiellplatsen

41

Kamppl
Kamper

P2

Palvelulinja
Service linje



PARTENZE - DEPARTURES

ORA TIME	PREVISTO Expected	DESTINAZIONE Destination
11:10		ROMA Fiumicino
12:40		VARSAVIA
13:15		STOCCARDA
13:20		MILANO Malpensa
14:05		MILANO Bergamo
16:45		MILANO Linate
19:20		ROMA Fiumicino
22:30		BOLOGNA
13:15		STOCCARDA
13:20		MILANO Malpensa
14:05		MILANO Bergamo
16:45		MILANO Linate

42" Outdoor E-paper Dual-sided Bus Stop Display

- 4k resolution, high contrast ratio, displays up to 16 grey levels.
- Pure reflection mode, clearly readable under outdoor direct sunlight.
- Embedded LED lighting enhances screen visibility in the dark.
- Ultra-wide viewing angle, No flicker, no blue light, comfortable and eye-friendly.
- Solar and battery powered, low power consumption, battery life up to 28 days.
- 42 inch E-ink display, black and white display, with a paper-like visual experience.



28 Day Battery life Solar & Battery-Operated

A built-in battery paired with a solar panel can power digital signage for weeks on a single charge – a perfect solution for areas with constant cloud cover.



Double-sided Display

There are two 42 inch large-format E-ink screens distributed up and down the front of the kiosk, supporting display the same/different content at the same time. They are very suitable for use as outdoor bus stop signs. One side displays news/emergency notices and the other side displays arrival /traffic information.



Display Is Like Ordinary Paper

Using the black and white monochrome e-ink screen technology, which mimics the appearance of ink on paper, giving it a paper-like visual experience and is easy to read.

31.2" Battery Operated E-paper Public Signs

- 31.2 inch, using monochrom E-ink display, with paper-like visual experience.
- 2k/4k resolution, high contrast ratio, displays up to 16 grey levels.
- Pure reflection mode, clearly readable under strong light.
- Ultra-wide viewing angle, No flicker, no blue light, comfortable and eye-friendly.
- Solar/battery powered, low power consumption, cost-efficient and eco-friendly.
- Bi-stable technology, the screen content remains even after a power outage.
- Android 7.1 OS 1GB RAM + 8GB storage, supports Wi-Fi/LAN/optional 4G and BT5.0.




Support Horizontal and Vertical Modes

Freely choose horizontal or vertical display mode. It has a wide range of uses and can display content ranging from announcement signs and billboards to black and white photos/art paintings, slogans, etc.

Small Pixel Pitch LED Panel

Rcstars provides customized LED solutions for any application or environment, enhancing the user's viewing experience with bright, high-contrast, and detailed images. With various optional pixel pitches, seamless splicing features, and customizable enclosure designs, you can create endless possibilities and build an LED advertising display that perfectly matches your needs.

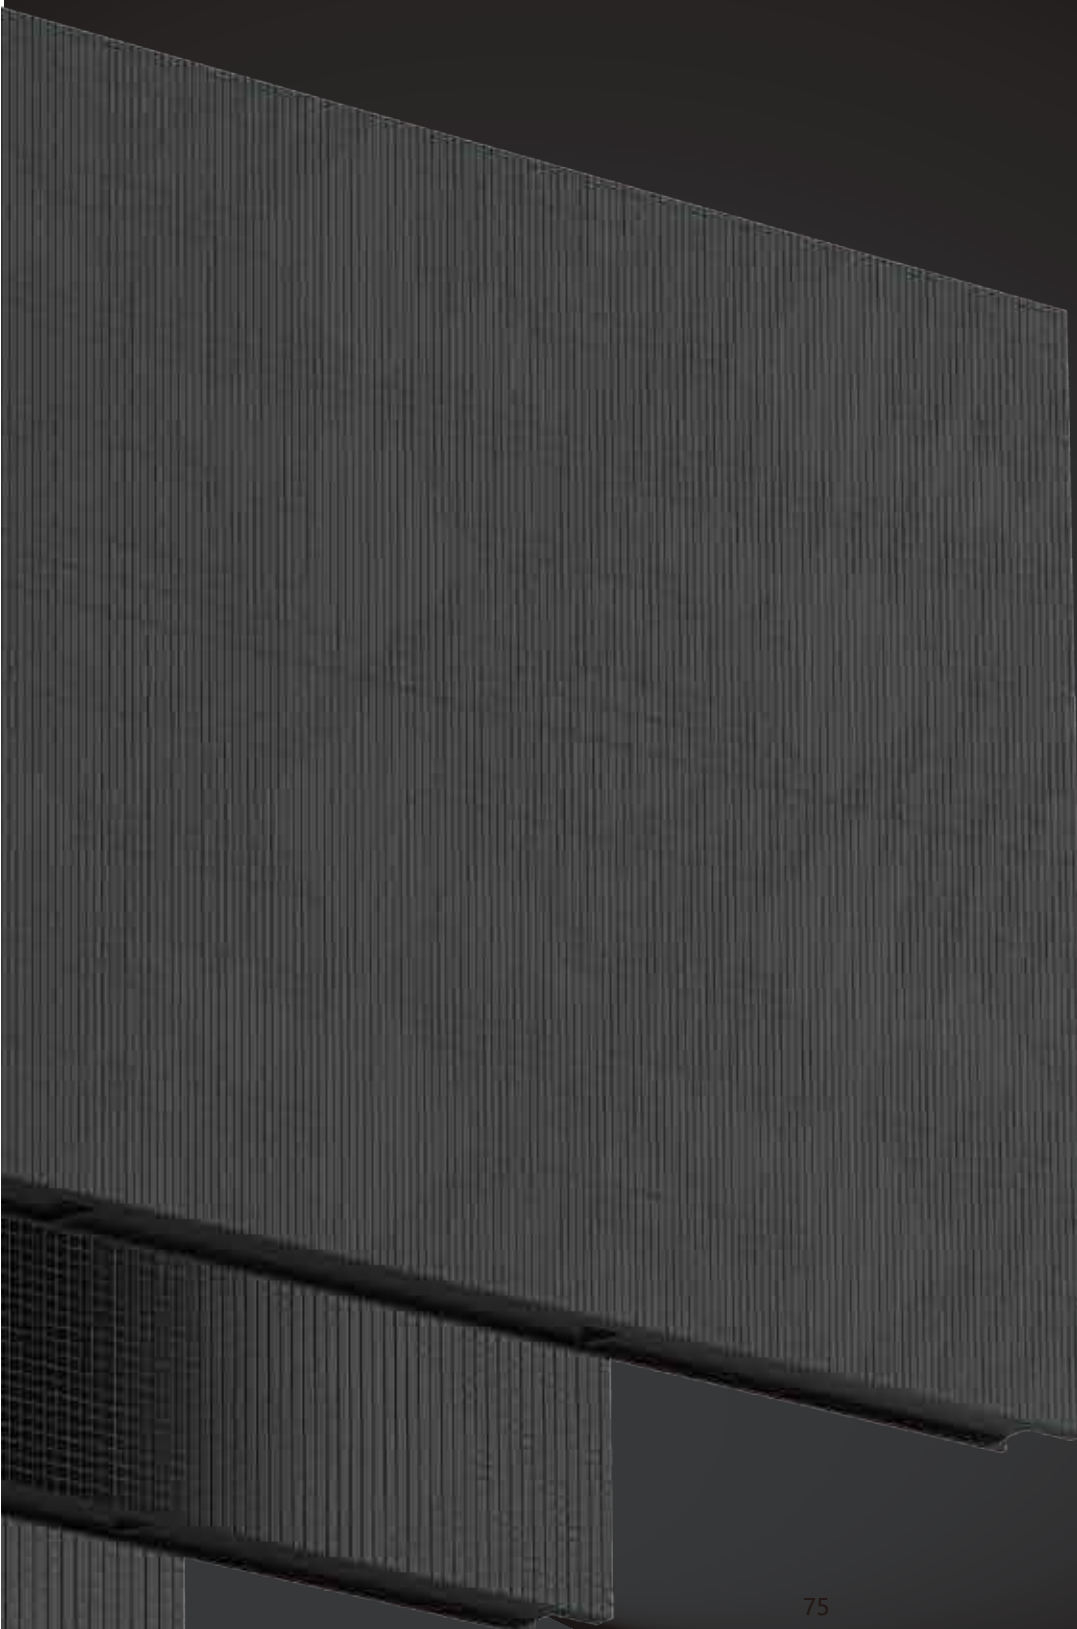

160° / 140°

Wide Viewing Angle

4.398 trillion

Color

16-bit

Grayscale

8K

2K / 4K / 8K

4200Hz

High refresh


Vibrant Colors, Precise Presentation

Full-color LED screens, driven by a control system, use red, green, and blue LEDs to achieve 4.398 trillion color variations. Even in low-light environments, they maintain accurate R/G/B gradation, delivering precise and detail-rich color.



High Refresh Rate Delivers Smooth Visuals

The 4200Hz high refresh rate ensures smooth playback, significantly reducing ghosting, eye strain, and image blurring, optimizing the visual experience.

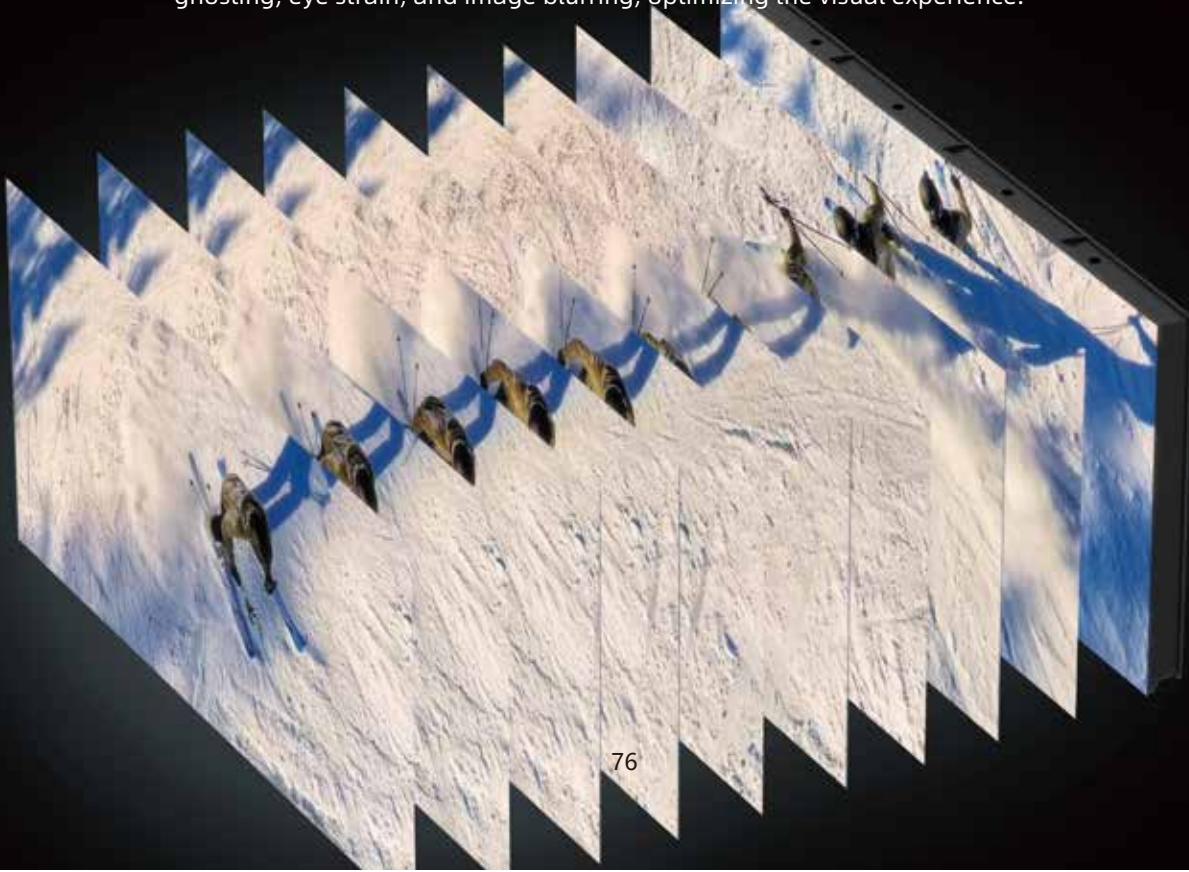

Seamless Curvature

Enables the LED soft panel to achieve seamless connections and smooth transitions. Whether for commercial displays, entertainment events, or public art, it offers a broader and continuous field of view, delivering an immersive viewing experience.

$\geq 120^\circ$
inner arcs




$\geq 135^\circ$
outer arcs



Horizontal assembly with outer arcs $\geq 135^\circ$ and inner arcs $\geq 120^\circ$, vertical assembly with inner and outer arcs $\geq 170^\circ$, allows for flexible construction of cylindrical screens, ribbon screens, and wave screens, offering versatile creativity.

16-bit Grayscale

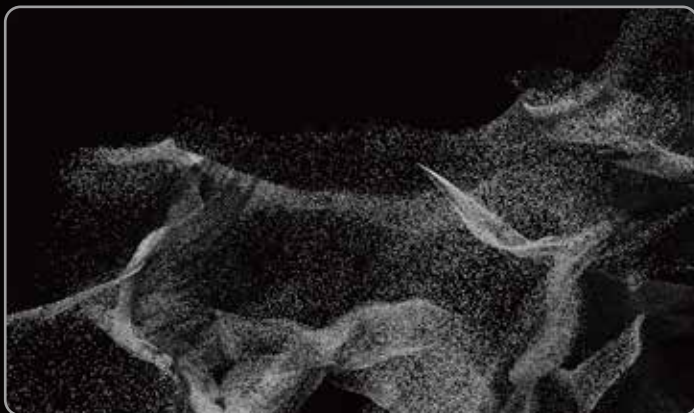

Even below 100 nits brightness, it can achieve high grayscale, presenting richer image depth and vividness compared to traditional screens.

High Contrast Ratio




The high contrast ratio authentically reproduces deep blacks and vibrant colors, enhancing detail and visual impact.

Small Pixel Pitch LED Panel



Small Pitch Indoor LED Display

Fine Pitch P0.9-2.0

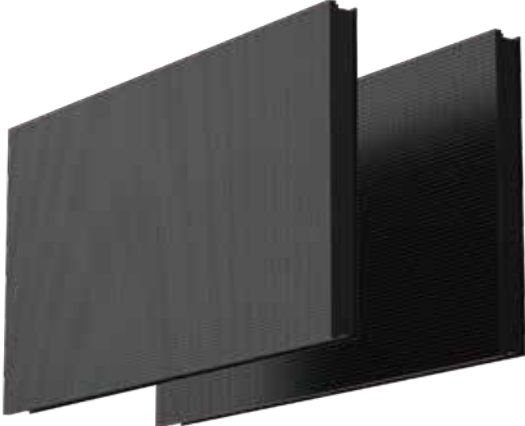


Outdoor Fine Pitch LED Display

Fine Pitch P2 / P2.5



Flexible LED Display for Column Shaped

Fine Pitch P2.0 / P2.5

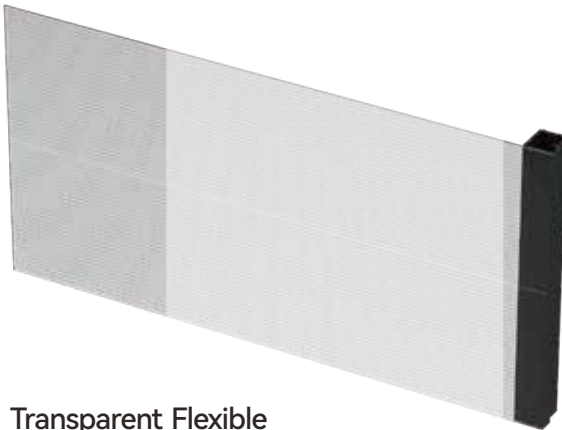

Transparent Flexible LED Film

P3.9

LED Small Pitch Full Color Display



OEM/ODM

Customize Your LCD Advertising Display

OEM: Design and produce according to customer's specifications, and paste the designated brand name to sell.

ODM: Provide customers with all services from product research and development, design and manufacturing to later maintenance, and stick the customer's brand for sales.

Service Commitment

To fulfill diversified requirements from various projects, there are thousands of products, closed- frame, open-frame, desktop, ceiling mount, freestanding, Kits... With rich experience in digital signage industry, our product lines could reach both standard or non- standard mounting solutions. We can provide all kinds of ODM/OEM service according to different customers' requirements, from mechanical design to value-added features, such as motion sensor, touch screen, printer,

- Professional technology

Independent research and development capability, efficient and stable production control procedures and product inspection.

- Professional products

With decades of experience, the product quality is strictly controlled. The innovative product developed

- Professional service

Create suitable product functions for customers, follow up latest market feedback, help customer develop market and do the best after-sales support.

- Professional factory

With skilled engineering team, professional equipment, independent R & D team, algorithm

Customized Solution

Customized appearance and function design;

Production and test service

Shipment support service;

Long-term maintenance service;

Quality certification service

NDA support service & Other services.

OEM/ODM Procedure



Identify requirements:

Understand customer needs and provide solution.



Contract:

Determine the product Quantity, Quotation, Specification, Delivery Time, Payment Term, Risk Control and other requirement while signing a contract, to avoid disputes.



Shipment:

Confirm payment state and arrange shipment. Inform ETA date and share shipping documents.



Tracking:


Actively follow up after-sales to achieve the purpose of continuous cooperation.

RS-550XM series

55 Inch OLED Transparent Display

It uses a new OLED panel with high light transmittance. It has wide viewing angle, high contrast, high reaction speed and high color saturation. The real picture is more clear and accurate, the current picture is optimized to make more details realistic. The self-luminous display technology does not need to rely on additional backlight sources, and the non-luminous pixels present a high transparent state, which can realize the superimposed display of virtual reality and present the effect of 3D. Ensure sufficient lightness and thinness in form. This inherent structural feature meets the needs of customers who want to make the display screen thin, even bend and fold.

Panel Model	55" OLED transparent screen
Aspect Ratio	16:09
Max Resolution	1920×1080
Display Color	40 % transparency
Touch	10 points capacitive touch
Brightness	400 nits brightness
Brightness Type	LG original screen
Seam(mm)	6.6 mm ultra-thin design
Contrast	150,000:1
Visual Angle	178° visual angle
Power Supply	AC 100-240 V power supply
Installation	Wall-mounted/Floor stand
Interface	With HDMI and DP interface

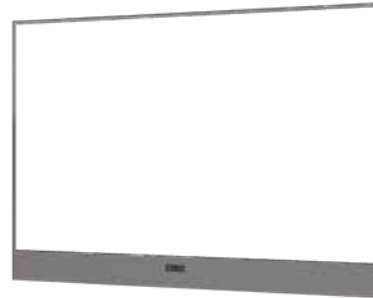

XM

OEM/ODM Support
DIY Support



RS-550XM



RS-550XM



RS-550XMS
(No Touch)

RS-236CR Series

23.6 Inch Round Screen

Panel Model	23.6 inch
Aspect Ratio	1:1
Max Resolution	848×848
Brightness	1500 cd/m ²
Brightness Type	AUO original screen
Contrast	4000:1
Installation	DIY support/ OEM/ODM support
Interface	HDMI/DP/USB



CR

Function



24/7/365



High Brightness



High Contrast



Multiple Video Specifications

OEM/ODM Support
DIY support



RS-236CR



RS-236CRAZ



RS-236RO

RS-190MR Series

19 Inch MR Android Digital Mirror LCD Display

A cosmetic mirror that can play ads on one side

- Intelligent touch switch, quick response, wet hand touch;
- The local weather is updated automatically, and the time and temperature are switched and displayed automatically;
- Full HD screen display, clearer display/no distortion;
- LED waterproof light bar, stable, non-flashing, safe and more energy-saving.



MR

Function



Wet Hand Touch



Autoupdate




HD Screen



LED Light Bar



Restore to a mirror automatically when approaching, and play pictures, videos and other advertising content when you leave.

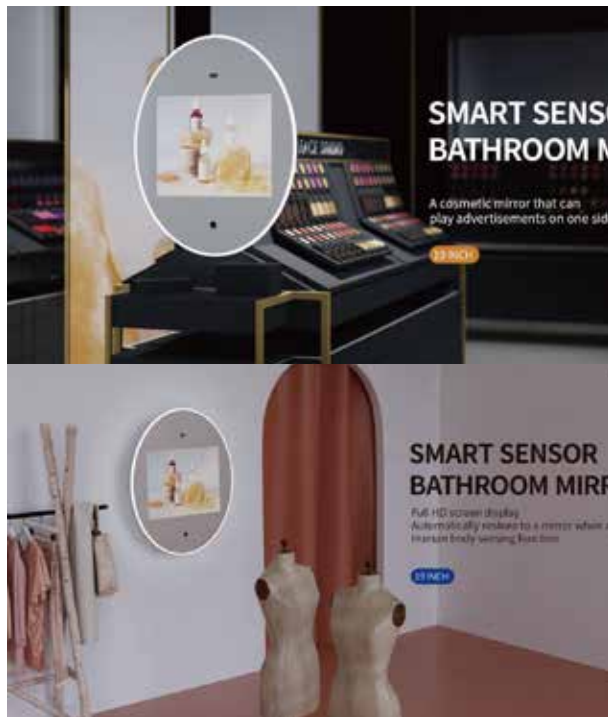

Support for use in a variety of environments. Human body sensor function, light up when people come, and disappear slowly when people walk away.

49.5" Smart Full-Length Mirror with Double-Sided Stretched Display

- 49.5 inch stretched screen, 500 nits brightness, 1920×540 resolution,
- 178° full viewing angle display, clear and bright at any angle.
- Double-sided display, with mirroring, seamless switching between advertising and mirror.
- Silver metal bracket and case, double-sided tempered glass protection.
- Human body sensing function, automatic sensing, the screen shrinks to the corner when a person approaches/returns to full screen when a person moves away.



Embedded Transparent OLED Touch Screen

- 55 inch OLED screen, FHD resolution, 200/600 nits brightness.
- High transparency seamlessly integrates the display and cabinet, achieving a harmonious presentation.
- Self-emissive pixels deliver vibrant colors and lifelike image quality.
- PCAP touchscreen offers self-service ordering and precise interactive experience.
- Optical bonding enhances touch accuracy and display quality, with waterproof and dustproof.
- Embedded cabinet installation, also customizable for other equipment, stand or desktop mounting.
- Double-sided tempered glass protection with black silk-screen decoration on the front.
- Android 11/7.1 OS with professional digital signage CMS.



Optical Bonding Technology

Reduces screen glare and reflection while enhancing contrast and color saturation, providing superior display quality under various lighting conditions.

Media Player Boxes

We suggest using a mouse to change the wallpaper. Connect a mouse with the digital panel through USB port, then follow the steps below.



RK3399	
Processor	Rockchip RK3399
CPU	Dual-core Cortex-A72 up to 1.8GHz and Quad-core Cortex-A53 up to 1.4GHz
GPU	ARM Mali-T860 GPU
Memory	LPDDR4 4GB (MAX), default 4G
Flash	16G/32G/64GB (default 32G)
Operation system	Android 11
WIFI	Built-in WIFI 802.11B/G/N
Bluetooth	Bluetooth 5.0
Ethernet LAN	100/1000M
	YES
Rear Panel I/O	
	1*USB 2.0 , 1*USB 3.0, 1*HDMI 2.0 output, 1*RJ45, 1*TF Card and SIM Card, 1*Earphone , 1*DC input



T357 I5	
Memory	DDR4 SO-DIMM slot *1, up to 32GB,
Storage	1*SATA Gen 3.0, up to 6Gb/s, 1*2260 (shared with Mini PCIe slot)
1Gb LAN	1*Intel® i219V, supports WOL/PXE; 1*RTL8111H; 2* RJ45
DP	Supports DP 1.2a up to 4096 x 2304 @ 60 Hz
HDMI	Supports HDMI 1.4 up to 4096 x 2160 @ 24 Hz (colay with eDP)
LVDS/COLAY_EDP	1*Full-Length Mini PCIe slot with on-board Nano-SIM socket
Mini PCIe	"1*M.2 Socket 1 with E key, type 2230 for WIFI/BT device and Intel® CNVi
M.2	1*M.2 Socket 3 with M key, type 2242(PCle & SATA mode)"
Audio CODEC	RTL CODEC AC897 2W
Rear Panel I/O	
	DP*1, HDMI*1, RJ45*2, USB2.0*2, USB3.2*2

Company Strength



What You Can Do In?

1. Choose Your System Support Program



Plug And Play Advertising Display



All-in-one Windows Display



LCD Monitor



Android Network Display

Plug And Play Advertising Display

- CPU: A401, 4-core, maximum frequency 1.2Ghz.
- Android 7.1 Operating system.
- 1GB RAM+16GB ROM.
- Support WLAN/Wi-Fi network connections.
- 1080P display output
- Supports updates via Wi-Fi, USB, TF card, Ethernet, or Internet.
- Supports overlay, subtitles, clock, HTML, streaming.

LCD Monitor

- Professional design for 7-24 hours operation
- DP/HDMI/VGA inputs, Type-c Port
- Support connecting with media player box/PC by HDMI input
- Full HD/UHD 4K resolution support

All-in-one Windows Display

- 13th/12th Gen Intel® Core™ i3/i5/i7 ADL-H Series processors
- Intel® Whiskey Lake SoC Chipset
- 1 × SO-DIMM DDR4 socket, Max. 32GB
- 1 × SATA Gen 3.0 (up to 6Gb/s), 1 × M.2 2260 (shared with Mini PCIe slot)
- LVDS/COLAY eDP, HDMI and DP with triple-view supported
- 1 × DP, 1 × HDMI, 2 × USB 2.0, 2 × USB 3.2 Gigabit Ethernet × 2
- Watchdog timer, Digital I/O, TPM

Android Network Display

- RK3399/527A optional
- Anroid 11/13 OS optional
- 2 GB/4 GB RAM optional
- 8 GB/16 GB/32 GB/64 GB fash optional
- 4G(optional)/WLAN/Wi-Fi network connection
- 802.11a/c/g/n/ac Internal Wi-Fi
- Portrait/landscape display mode
- 1080P /2160P display output

2. Custom Screen Size Specification

Optional size:

10.1"/12.1"/15"/15.6"/17"/17.3"/18.5"/19"/21.5"/23.8"/27"/32"/43"/49"/55"/65"/75"/86"/98"




4:3



16:9

Technical Specifications

Panel Model	10.1 inch	12.1 inch	15 inch	15.6 inch	17 inch
Max Resolution	1280×800	1280×800(WXGA)	1024×768	1920×1080	1280×1024
Pixel Pitch	0.1659×0.1659	0.204×0.204	0.297×0.297	0.17925×0.17925	0.264×0.264
Contrast Ratio	1300:1	800:1	1500:1	700:1	1000:1
Response Time	25 ms	35 ms	35 ms	25 ms	30 ms
Display Area(mm)	216.96×135.60	261.12×163.2	304.1×228.1	344.16×193.59	337.92×270.336
Panel Size(mm)	241.86×161.6×5.2	278×184×8.6	326.5×253.5×9.6	359.5×223.8×3.2	358.5×296.5×13.4
Screen Weight	180 g	550 g	950 g	1.2 kg	1.27 kg
Aspect Ratio	16:10	16:10	4:03	16:10	5:04
Viewing Angle	85/85/85/85	85/85/85/85	85/85/85/85	85/85/85/85	85/85/85/85
Brightness	500 cd/m ²	500 cd/m ²	500 cd/m ²	500 cd/m ²	500 cd/m ²
Lamp Type	WLED	WLED			WLED
Panel Model	17.3 inch	18.5 inch	19 inch	21.5 inch	23.8 inch
Max Resolution	1920×1080	1366×768	1440×900	1920×1080	1920×1080
Pixel Pitch	0.1989×0.1989	0.300×0.300	0.2835×0.2835	0.24825×0.24825	0.2745×0.2745
Contrast Ratio	800:1	1000:1	1000:1	1000:1	1000:1
Response Time	30 ms	14 ms	5 ms	14 ms	15 ms
Display Area(mm)	381.89×214.81	409.8×230.4	408.24×255.15	476.64×268.11	527.04×296.46
Panel Size(mm)	398.1×246.6×4	430.4×254.6×7.8	428×278×11	495.6×292.2×8.6	543×317.4×11.6
Screen Weight	550 g	1.29 kg	1.57 kg	2 kg	2.27 kg
Aspect Ratio	16:09	5:04	16:10	16:9	16:9
Viewing Angle	85/85/85/85	85/85/85/85	85/85/80/80	89/89/89/89	89/89/89/89
Brightness	500 cd/m ²	500 cd/m ²	500 cd/m ²	500 cd/m ²	500 cd/m ²
Lamp Type	WLED				

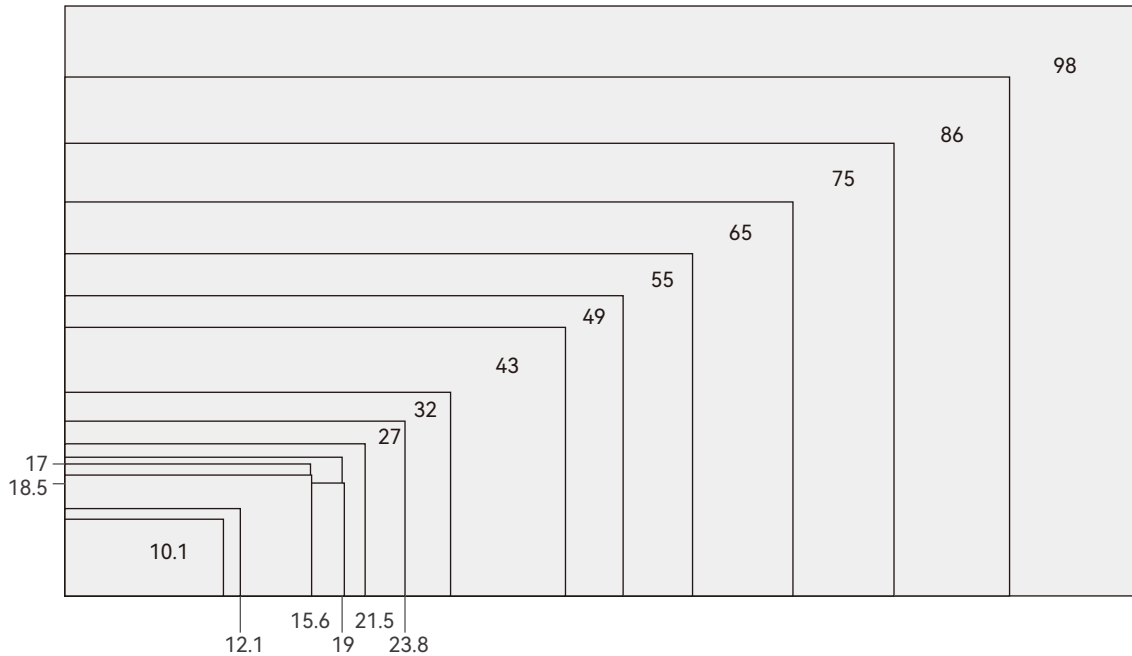


Size Comparison

Panel Model	27 inch	32 inch	43 inch	49 inch	55 inch
Max Resolution	1920×1080	1920×1080	1920×1080	1920×1080	1920×1080
Pixel Pitch	0.31125×0.31125	0.36375×0.36375	0.4903×0.4903	0.53025×0.53025	0.63×0.63
Contrast Ratio	1200:1	1400:1	1200:1	1200:1	1400:1
Response Time	12 ms	6.5 ms	26 ms	26 ms	6 ms
Display Area(mm)	597.6×336.15	698.4×392.85	941.184×592.416	1073.78×604	1209.6×680.4
Panel Size(mm)	630×368.2×15	727.4×429×227	973×565.8×29	1096.2×632.5×29	1244.6×720.9×27
Screen Weight	2.35 kg	4.8 kg	11 kg	11 kg	17.5 kg
Aspect Ratio	16:9	16:9	16:9	16:9	16:9
Viewing Angle	85/85/80/80	89/89/89/89	89/89/89/89	89/89/89/89	89/89/89/89
Brightness	500 cd/m ²	500 cd/m ²	500 cd/m ²	500 cd/m ²	500 cd/m ²
Lamp Type					WLED

Panel Model	65 inch	75 inch	86 inch	98 inch
Max Resolution	3840×2160	3840×2160	3840×2160	3840×2160
Pixel Pitch	0.372×0.372	0.4296×0.4296	0.4935×0.4935	0.5622×0.5622
Contrast Ratio	1400:1	1200:1	1200:1	1300:1
Response Time	13 ms	8 ms	8 ms	8 ms
Display Area(mm)	1428.48×803.52	1649.66×927.936	1895.04×1065.96	2158.85×1214.35
Panel Size(mm)	1459.2×830×16	1675.2×953.6×11.9	1922.2×1093.2×13.6	2187.8×1242.8×68.6
Screen Weight	22.7 kg	36 kg	39.9 kg	59 kg
Aspect Ratio	16:9	16:9	16:9	16:9
Viewing Angle	89/89/89/89	89/89/89/89	89/89/89/89	89/89/89/89
Brightness	350 cd/m ²	350 cd/m ²	350 cd/m ²	350 cd/m ²
Lamp Type	WLED	WLED	WLED	WLED

3. Choose Information Release System

Connecting your screens to our content management system can open up the true power of your digital signage. It can be managed locally by authorised users within your organisation.

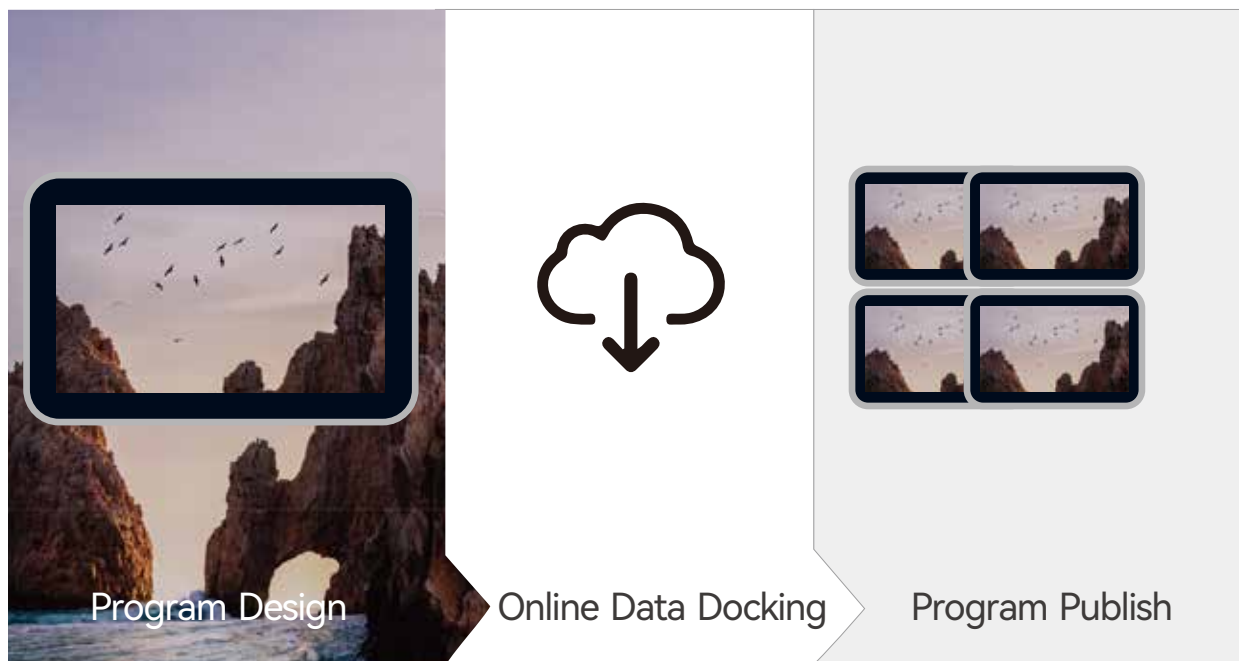

Scheduling

Create more engaging content by displaying relevant information at specific days or times of the week. Display campaigns relevant to time of day or day of the week, specific dates in the year or

Varied content

Use a range of different file formats for static and moving content, including videos to really capture the viewer. Design your own or let us help convert your static content, into attention-grabbing animated campaigns.

Custom layouts

Maximise available space by splitting the screen into sections to display specific content. This enables campaigns to deliver more than one message sedtiously –ideal in high-footfall locations.

Update your screens from anywhere

Access your screen functions from any where. Using the software you can remotely control functions such as rebooting or formatting your screen, playing and stopping content, adjusting the volume and scheduling on/off times; a truly centralized solution.

Multiple users

You can add multiple users to your account and set permissions to access specific screens or groups of screens. This can be set over multiple sites allowing a central head office function to provide limited access to specific regional sites.

Multi-screen synchronisation

You can synchronise the content across multiple screens that are connected to the same network. This is ideal for advertising networks on escalators or along lengthy corridors.

Our Advantage



Design

- We collect and absorb advanced and useful information from market and clients.
- We have strong and rich experience R&D engineers team to design and improve our mechanical and electronic layout depending on the information.



Qualification

We have strict IQC/QC/QA Process.

- 100% IQC Test for all incoming materials.
- 100% QC Test for all LCD Panels with A++ Grade.
- 100% 48 hours aging test for all finished products.
- 100% QA Test for all cargo before shipment.
- All products are with CE/FCC/ROHS Certificates, we also have all kinds of patent certifications.



Customization

We have more than 500 OEM/ODM clients all over the world. Specialty, flexibility and diversity are our features. We modify, build and design according to customers' needs and projects.



Fast delivery

We have our own hardware factory that can guarantee the metal shell design, production and quality control. Also prepare some products in stock according to the market hot-selling.



After-sale service

We provide excellent after-sale service and maintenance. Our team make sure that every project is maintained, checked and tested well. We also provide fast response within 12 hours.



Reliable package

We know LCD panel is damaged easily during transportation, we have very strong package (internal honeycomb carton/wooden case/flight case) to avoid the damage caused by transportation.

■ Company Environment

The spacious and bright office can create a good working environment for the employees, and make people more enthusiastic and continuous working motivation and devote themselves to the work.



■ Over 20,000 m² Production Area

With strong production capacity and skilled workers meet timely delivery and quality assurance.

Employees have professional skills and experience to competently perform the tasks, and the production lines are organised into dedicated areas with teams of people and sufficient tooling and equipment to fully produce a range of components, sub-assemblies or finished products.



■ Finished Product Warehouse


Our inventory control system with periodical stock checking and good stock accuracy is strictly controlled by the warehouse manager. The warehouse department has first-in first-out stock control with detailed entry and exit stock transactions recorded including batch picking/packing and measurement of supplier delivery accuracy.




■ Equipment Display

Our hardware equipment includes: high temperature test, waterproof test, vibration test, cutting machine, wire machine and many precise instrument.

Large Equipment Operation Room

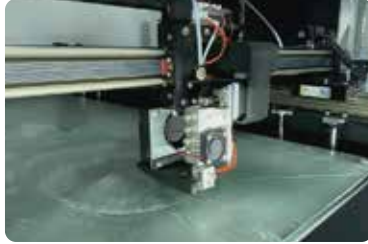

Precise Instrument

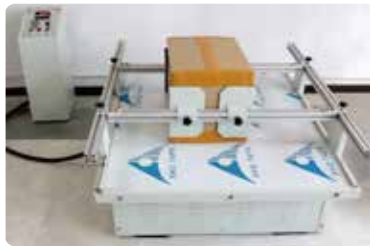

Algorithm Department

Responsible for the software development of new products, the development and maintenance of the company's ERP system, and the development of software for info release and enterprise digital asset management plans to improve the company's corporate standards. Leading the preparation and revision of the company's technical standards, quality standards, process specifications, technical specifications and scientific research reports.

Info Release



Information Release System is based on the multimedia information release function of the Internet and LAN. It can help government, enterprises, hospitals, banks, transportation, schools, buildings, business halls, shopping malls, hotels, restaurants, stores and chain institutions to build a multimedia information publishing platform based on the network that can release videos, pictures, subtitles, web pages, apps and other media matrices on a large screen. In addition, it can also provide users with low-cost and high-quality multimedia information cloud services.

ERP Admin



In an enterprise, the general management mainly includes three aspects: production control (planning/manufacturing), logistics management (distribution/procurement/inventory management) and financial management (accounting/financial management). ERP will provide decision-makers and employees with means of decision-making operation with systematic management ideas and it will comprehensively record all business information and generated data. In accordance with the unified data entry format and norms, It can achieve the interconnection of all data information and then it is transformed into the work assistance of the decision-making, management and operation level through advanced data statistics, analysis and excavation.

Group ECM



ECM is based on the latest front-end and back-end separation technology creating a readable and writable area like a library for the enterprise's own document content and digital assets accumulated over the years. It is convenient for data acquisition, management, storage, protection and presentation. Therefore, it is a management system that can better assist companies to standardize documents.

Operating system



As a software product in the era of COVID-19, with the help of hardware features, the RsWasher android client can measure temperature, monitor the volume of disinfection liquid such as alcohol and monitor the frequency of hand washing. It can also be combined with the background of Hand Wash System to realize service management.

Honor Qualification



Innovative and high technology enterprise



Shenzhen professional, refined, specialized, novelty enterprise




HDMI adopter



EU trademark official certificate



Environmental management system certification

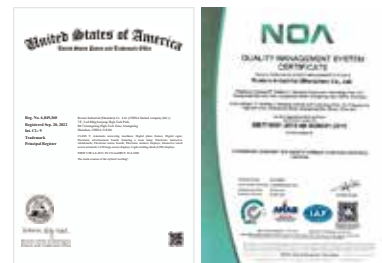

US trademark certificate ISO certificate



CE/ROHS/HDMI certificate



New practical patents



Design patents



R & D software patents

■ Successful Case

