

High Brightness Commercial Window Displays

- ◆ Commercial Window Facing Signage
- ◆ Indoor High Brightness Advertising Kiosk



Content

Commercial Window Facing Signage	01
55" Single-sided Window Facing Display	04
55" Window Facing Display with Tempered Glass	05
55" Freestanding High Brightness Commercial Window Display	06
43" Indoor Double-sided High Brightness Kiosk	07
Indoor High Brightness Advertising Kiosk	10
55" High Brightness Digital Kiosk with Unique Stand	12



Ordinary



With Glass Cover




Free Standing




Free Standing



Commercial Window Facing Signage

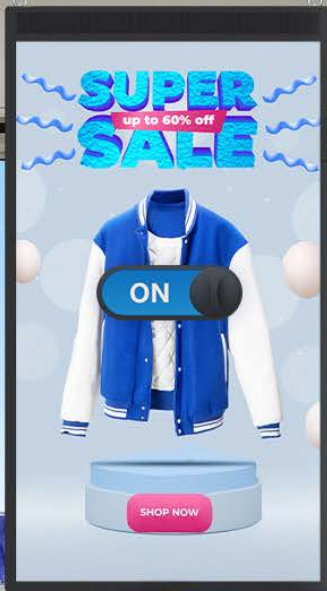

9:00 PM
POWER OFF

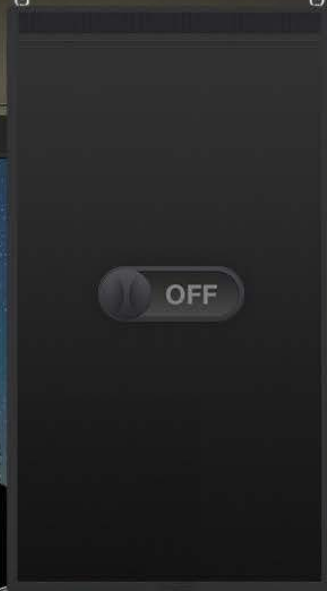


6:00 AM
POWER ON

Eco-friendly and Energy-saving Power Timer

Free to set the screen on/off time for each day or week, more eco-friendly and smarter with lower consumption.

Commercial HD Window Digital Signage

Never let customers neglect your store.

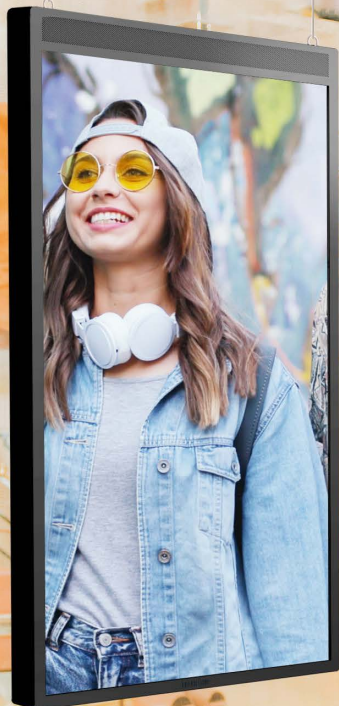

Eye-catching



No Attention


1500-3500 nits Ultra-high Brightness

No more fear of direct sunlight, you can capture the customer's attention with a clear and visible picture even from a distance.




High Temperature Resistant Screen Up to 110 Degrees Celsius



Perfect appearance is essential for window displays, and screens won't blacken even after long usage will perfectly meet your business needs.



Won't blacken

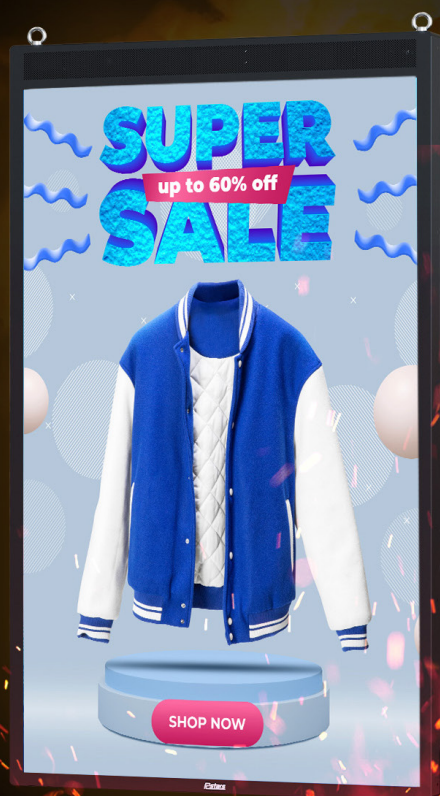

55" Single-sided Window Facing Display

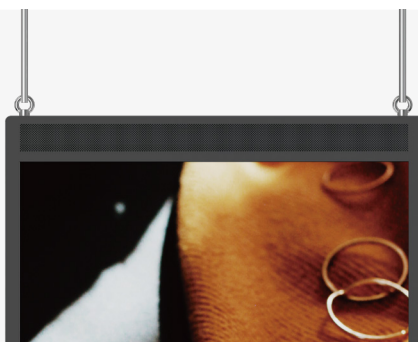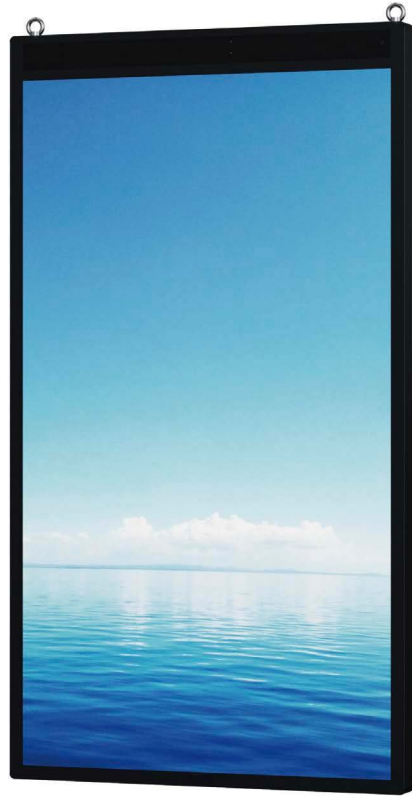

Integrated Ceiling Mount

The screen comes with an integrated wire hanging mounting solution, so no additional ceiling mount is required. You can even hide the power and data cables in the cover tubes provided.



RS-550SWGZ

55" Window Facing Display with Tempered Glass



Can Add Laminated Tempered Glass

With high heat resistance and IK10 explosion-proof rating, it protects the screen from high temperature overload and screen blackening caused by long-term direct sunlight and usage, while resisting external impact.



With Freestanding Stand

RS-550SWAZ

55" Freestanding High Brightness Commercial Window Display



Lightweight Enclosure

The streamlined case has an ultra-slim machine and extremely narrow bezels. This minimalist appearance creates the largest possible display area to help you attract more attention.


With Special-shaped Stand

43" Indoor Double-sided High Brightness Kiosk



Special-shaped Stand

The center of the unique stand is connected to square glass, with upper and lower hollow design. It is an ideal digital signage solution for beautifully decorated interior scenes.

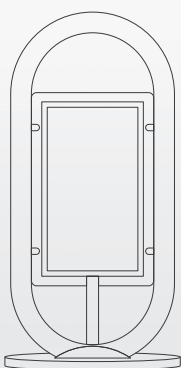

High Brightness for Well-Lit Venues

The indoor display with brightness up to 700 nits and 2k HD resolution can still present clear and bright content in well-lit indoors.



Ultra Slim

The double-sided thickness is only 50 mm, which is thinner than most single-sided displays.



Double-sided Display

Maximize the impact of your signage by engaging customers with eye-catching double-sided displays and the flexibility that display the same or different content on both sides at the same time.



Easy to Move

The bottom of the base is integrated with rollers and foot, allowing you to move it easily and reinforce the installation.





Specifications

Panel	Ordinary	With Glass Cover	Freestanding	Special-shaped
Panel Model	55 inch TFT LED	55 inch TFT LED	55 inch TFT LED	43 inch TFT LED
Max Resolution	1920×1080	1920×1080	1920×1080	1920×1080
Aspect Ratio	16:09	16:09	16:09	16:09
Pixel Pitch	0.63×0.63	0.63×0.63	0.63×0.63	0.4903×0.4903
Viewing Angle	89/89/89/89	89/89/89/89	89/89/89/89	89/89/89/89
Contrast Ratio	1400:1	1400:1	1400:1	1200:1
Brightness	2000 cd/m ²	2000 cd/m ²	3000 cd/m ²	700 cd/m ²
Response Time	6 ms	6 ms	6 ms	26 ms
Display Area(mm)	1209.6×680.4	1209.6×680.4	1209.6×680.4	941.184×529.416
Panel Size(mm)	1244.6×720.9	1244.6×720.9	1244.6×720.9	973×565.8×29
Screen Weight	17.5 kg	17.5 kg	17.5 kg	11 kg
Packaging	Ordinary	With Glass Cover	Freestanding	Freestanding
Machine Size(mm)	727.4×80×1313.6	727.4×108.61×1303.6	750×460×1788.6	1000×500×2006.4
Machine Weight	26 kg	36.5 kg	102.5 kg	125.5 kg
Out put	AC 100-240 V, 50-60 Hz	AC 100-240 V, 50-60 Hz	AC 100-240 V, 50-60 Hz	AC 100-240 V, 50-60 Hz
Consumption	156 W	244 W	209 W	94 W
System	Memory			Optional OS
Processor	RK3399	Ram	4 GB	Compatible With Android, Windows (Customized Unit Optional)
OS	Android 11	Hard drive	32 GB	

Indoor High Brightness Advertising Kiosk

2



3500 nits Ultra-High Brightness

Clearly visible under direct sunlight and designed for bright indoor spaces.



3000 nits
High Brightness



Extensive Customizability

The appearance and color of the bracket, base, and light bars on both sides are up to you.

RS-550HLFAZ

55" High Brightness Digital Kiosk with Unique Stand



Color-adjustable LED Light

Equipped with warm and color-adjustable LED light bars on the left and right sides.







White Metal Material Design

The bracket design is special streamlined and special shaped hollow.





Specifications

Panel		Packaging	
Panel Model	55 inch TFT LED	Machine Size(mm)	764×450×1873
Max Resolution	1920×1080	Machine Weight	78 kg
Aspect Ratio	16:09	Out put	AC 100-240 V, 50-60 Hz
Pixel Pitch	0.63×0.63	Consumption	210 W
Viewing Angle	89/89/89/89	Processor	RK3399
Contrast Ratio	1400:1	Ram	4 GB
Brightness	3000 cd/m ²	Hard drive	32 GB
Response Time	6 ms	OS	Android 11
Display Area(mm)	1209.6×680.4	Compatible With Android, Windows (Customized Unit Optional)	 Android  LCD Monitor
Panel Size(mm)	1244.6×720.9		 Windows  Plug & Play
Screen Weight	17.5 kg		